





Ship and Offshore

Approved communication cables
for ship- and offshoreindustry





OVER 100 YEARS OF EXPERIENCE



1913 - 2013

Since 1913, and with a legacy that spans over 100 years, NEK Kabel AS has been innovators in the design and manufacture of high performance wire and cable for demanding applications, mainly for communication.


NEK Kabel's extensive knowledge and experience in the offshore and marine industry translates into a clear understanding of international standards and specifications that guarantees superior electrical and mechanical properties. Oil and gas exploration and production have moved to harsher environments, which are colder, hotter, and deeper thus requiring a cable that can withstand exposure to chemicals, high temperatures and high pressures. As an important supplier of cabling solutions to the shipboard and offshore industry, we continue designing new products, and creating new solutions to meet tomorrow's market challenges.

NEK Kabel products has obtained certifications from the main classification bodies, like Det Norske Veritas and Germanischer Lloyd (DNV-GL) and American Bureau of Shipping (ABS), and fully compliant to International Electrotechnical Commission (IEC).

NEK Kabel's wide array of cabling solutions has been supplied to the world's top oil companies, international EPC operators, major shipyards, ship owners, process control & instrumentation automation companies, and many oil field equipment manufacturers, over 5 continents.

There is no other field of applications that require long-lasting, indestructible and highly resistant solutions than the offshore environment. Therefore at NEK Kabel, we strictly adhere to the industry's highest standards of quality and compliance.

Asia Pacific
Company: AX Coleman Pte Ltd
Contact Joe Sim
Email Joe.Sim@axcoleman.com

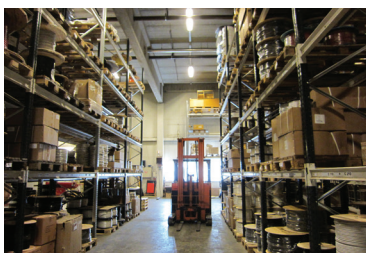

KNOWLEDGE

RANGE

EXPERIENCE

Index

Category and RS

LanMarin® Cat 5E S/FTP Flexible SHF1	-----	5
LanMarin® Cat 5E S/FTP Flexible MUD	-----	6
LanMarin® Cat 6 U/UTP SHF1	-----	8
LanMarin® Cat 6 F/UTP SHF1	-----	9
LanMarin® Cat 6A S/FTP SHF1	-----	11
LanMarin® CAT 7 SSTP SHF1	-----	13
LanMarin® CAT 7 SSTP MUD	-----	15
RS 422 Marine ARM	-----	17
RS 485 Marine ARM	-----	19
RS 485 Marine ARM MUD	-----	21

Coaxial 50ohm

RG 58CU Marine SHF1	-----	23
RG 58CU Marine MUD	-----	24
RG 58CU Marine ARM	-----	25
RG 213 U Marine	-----	27
RG 213 U Marine MUD	-----	28
RG 213 U Marine ARM	-----	29
RG 213 U Marine ARM MUD	-----	30
RG 214 U Marine	-----	32
RG 214 U Marine MUD	-----	33
RG 214 U Marine ARM	-----	34
RG 214 U Marine ARM MUD	-----	35
RG 215 Marine LSZH	-----	37
RF 400	-----	38
RF 400 Ultraflex	-----	40
RF LLF 1/2" 50 Hiflex	-----	42
RF LLF 1/2" 50 Hiflex MUD	-----	44
RF LLF 1/2" 50	-----	46
RF LLF 1/2" 50 MUD	-----	47
RF LLF 7/8" 50 Hiflex	-----	49
RF LLF 7/8" 50 Hiflex MUD	-----	51
RF LLF 7/8" 50 SHF1	-----	53
RF LLF 7/8" 50 MUD	-----	54

Connectors for coaxial 50ohm

UHF N-Male for RG 213	-----	56
N-Female for RG 213	-----	56
N-Male for RG 214	-----	57
UHF for RG 214	-----	57
Male N-connector for RF 400 Ultraflex	-----	58
Male and Female for RF LLF 1/2"	-----	59
Male and Female for RF LLF 7/8"	-----	60

**Coaxial 75ohm**

RG 59 B/U Marine Flex	-----	61
RG 59 B/U Marine Flex ARM	-----	63
RG 6 A/U Marine	-----	65
RG 6 A/U Marine MUD	-----	67
RG 11 A/U Marine	-----	69
RG 11 A/U MarineMUD	-----	71
RG 11 A/U Marine ARM	-----	73
RG 11 A/U Marine ARM MUD	-----	75
SAT 22 ITV	-----	77
SAT 21 ITV	-----	79

Connectors for coaxial 75ohm

Male for RG 59 og F-konnektor for RG 11	-----	81
---	-------	----

BUS cables

CAN Bus Marin 1 pair	-----	82
CAN Bus Marin 2 pairs	-----	84
Profibus DP Marin	-----	86

Fiber cables

QFCI	-----	88
QFCU (QFCI MUD)	-----	90
QFAI UNI	-----	92
AICI	-----	94
AIAI	-----	96
Data for fibers	-----	97

SHF1 versus SHF2

The table below addresses only some main characteristics differences.
For complete information see IEC 60092-359

	SHF1	SHF2
Type of material	Halogen-free Thermoplastic	Halogen-free Elastomeric or thermosetting material
Some main characteristics		
Mechanical characteristics after immersion in hot oil (IEC 60811-2-1, clause 10)* * If oil resistance is required for a halogen-free compound, SHF2 compound is recommended	No requirements	100°C for 24 hours: - ±40% maximum variation in tensile strength: - ±40% maximum variation in elongation at break
Hot set test (IEC 60811-2-1, clause 9)	No requirements	200°C, 15 min time under load with 20(N/mm ²) mechanical stress: - 175% Maximum elongation under load - 25% Maximum permanent elongation after cooling
Pressure test at high temp. (IEC 60811-3-1, subclause 8.2)	80°C, 4-6 min under load depending on cable diameter: - 50% Maximum permissible deformation	No requirements
Heat shock test (IEC 60811-3-1, subclause 9.2)	150°C) 1hour duration	No requirements
Ozone resistance test IEC 60811-2-1, clause 8 (Alternative test method may be used in some countries for legal reasons)	No requirements	25±2°C for 24 h: - Max 0,025 to 0,030% ozone concentration (in volume)

LanMarin® Cat 5E

S/FTP Flexible
SHF1
DNV-GL

Application

LAN cable, designed for ship- and offshore applications. Fire retardant.




Construction

Conductor	0.22 [mm ²] Stranded Plain Cu AWG 24 (7x0.20mm)
Insulation	Solid PE Ø=1,4 [mm]
No. of pairs	4
Colour code	IEC 60189-2
Individual Screen pairs	Al-/polyester tape
Overall Screen	Tinned Cu-braid
Jacket	Grey SHF1
Outer diam	7,7 [mm]
Weight	68 [kg/km]

Jacket marking

NEK Kabel (week/year) LanMarin Cat 5e S/FTP 4 PAIRS AWG24/7 - DNV-TK



Specifications

Operating temperature	-40 – +90 [°C]
Temperature @ installation	-15 – +50 [°C]
Characteristic impedance	100 ± 5 Ω
Conductor resistance	88 [Ω/km]
Insulation resistance	≥ 500 [MΩ x km]
Capacitance	52 [pF/m]
Min. bending radius	10 [x outer diam]

Norms

Halogenfree, max content corrosive and toxic gases	IEC 60754-1 862
Design and testing standards	IEC 61156-6
Sheathing material	IEC 60092-360 (359)
Flame retardant	IEC 60332-1
Fire retardant	IEC 60332-3-22 Cat.A
Smoke emission	IEC 61034-1, -2
UV-resistant	ASTM D 2565 92A
Certification	DNV-GL
Part No.	1089606



LanMarin® Cat 5E MUD

S/FTP Flexible
MUD Resistant Jacket, SHF2
UV Resistant
DNV-GL


Application

LAN cable designed for ship- and offshore applications.



Construction

Conductor	0.22 [mm ²] Stranded Plain Cu AWG 24 (7x0.20mm)
Insulation	Solid PE 1,4 [mm]
No. of pairs	4
Colour code	IEC 60189-2
Individual Screen pairs	Al-/polyester tape
Overall Screen	Tinned Cu-braid
Inner jacket	SHF1 8.2 [mm]
Jacket	Black SHF2
Outer diam	10.2 [mm]
Weight	98 [kg/km]
Jacket marking	NEK Kabel (week/year) LanMarin Cat 5e S/FTP 4 PAIRS AWG24/7 - MUD IEC 60332-3-22 DNV-TK Metermarking



Specifications

Operating temperature	-40 - +90 [°C]
Temperature @ installation	-15 - +50 [°C]
Characteristic impedance	100±5 [Ω]
Conductor resistance	88 [Ω/km]
Insulation resistance	500 [MΩ x km]
Capacitance	43 [pF/km]
Part No.	1089607

Norms

Halogenfree, max content corrosive and toxic gases	IEC 60754-1 862
Design and testing standards	DNV TAP 6-800 App.A;827.50-2 IEC 61156-5
Sheathing material	IEC 60092-360 (359)
Flame retardant	IEC 60332-1-2
Fire retardant	IEC 60332-3-22 Cat.A
Ozone resistant	IEC 60811-2-1
Oil and fuel, hydrocarbons resistant	IEC 60811-2-1
Smoke emission	IEC 61034-1, -2
MUD resistant	NEK TS 606
UV-resistant	ASTM G 154
Certification	DNV-GL

Attenuation for Cat 5E

Frequency (MHz)	Attenuation Max. (dB/100m)	NEXT (dB)	Return loss (dB/100m)
1	2	98.7	63,8
4	3.9	103.6	51,8
10	6.2	104.8	43,8
16	7.9	103.4	39,7
20	8.9	100	37,8
31.25	11.3	98.6	33,9
62.5	16.1	98.8	27,9
100	20.2	102	23,8



LanMarin® Cat 6 U/UTP

Double jacket, SHF1, UV

250 MHz

DNV-GL


Application

Tough double jacketed halogenfree unscreened LAN cable, designed for ship- and offshore applications, and other harsh environments. Indoor/outdoor use. Excellent mechanical and fire retardant properties.



Construction

Conductor	Solid Plain Cu 0.57 [mm] AWG23
Insulation	Cellular PE
No. of pairs	4 held by PE central cross
Colour code	IEC 60189-2
Inner jacket	SHF1 6.7 [mm]
Jacket	Black SHF1
O.D.	8.1 [mm]
Weight	80 [kg/km]
Jacket marking	NEK Kabel (week/year) LanMarin Cat 6 U/UTP SHF1 IEC60332-3-22 DNV-TK Lot metric marking



Specifications

Operating temperature	-40 – +90 [°C]
Characteristic Impedance @ 1MHz	100±15 [Ω]
Insulation resistance	5000 [Ω x km]
Capacitance pair	49 [nF/m - v/1KHz]
Velocity factor	0,7
Min. bending radius	4 [x outer diam]

Norms

Halogenfree, max content corrosive and toxic gases	IEC 60754-1 862
Design and testing standards	IEC 61156-5 IEC 60092-350
Sheathing material	IEC 60092-360 (359)
Flame retardant	IEC 60332-1
Toxic gases max.	EN 50305 9.2
Fire retardant	IEC 60332-3-22 Cat.A
Smoke emission	IEC 61034-1, -2
UV-resistant	ASTM G 154
Certification	DNV-GL
Part No.	1089600

LanMarin® CAT 6 F/UTP

F/UTP

SHF1 UV resistant

DNV-GL


Application

Tough halogenfree screened LAN cable, designed for ship- and offshore applications, and other harsh environments. Indoor/outdoor use. Excellent mechanical and fire retardant properties.



Construction

Conductor	Plain Cu 0.57 [mm] AWG23/1
Drain wire	0.5 mm Tinned Cu
Insulation	Cellular PE
No. of pairs	4 pairs held by PE central cross
Colour code	IEC 60189-2
Overall Screen	Al-polyester tape
Inner jacket	SHF1 7.2 [mm]
Outer Jacket	Grey UV-resistant SHF1
Outer diam	8.6 [mm]
Weight	95 [kg/km]
Jacket marking	NEK Kabel (week/year) LanMarin Cat 6-F/UTP 4 pairs AWG23/1 SHF1 DNV-TK lot Metric marking



Specifications

Operating temperature	-40 – +90 [°C]
Impedance at 100MHz	100±5 [Ω]
Conductor resistance	<70 [Ω/km]
Insulation resistance	500 [MΩ x km]
Test voltage	2500 [V-DC x 2]

Norms

Halogenfree, max content corrosive and toxic gases	IEC 60754-1, -2
Design and testing standards	DNV TAP 6-800 aPP.a;827.50-2 IEC 61156-5
Sheathing material	IEC 60092-360 (359)
Flame retardant	IEC 60332-1
Toxic gases max.	EN 50305 9.2
Fire retardant	IEC 60332-3-22 Cat.A
Smoke emission	IEC 61034-1, -2
UV-resistant	ASTM D 2565 92A
Certification	DNV-GL
Part No.	1089601



Attenuation for Cat 6 U/UTP og Cat 6 F/UTP

Frequency (MHz)	Attenuation Max. (dB/100m)	NEXT (dB)	Return loss (dB/100m)
4	3.6	73.4	
10	5.6	66.1	
16	7.2	68	
20	8.1	59.5	29.6
31.25	10.2	61.5	31
62.5	14.4	61.3	35.4
100	18.3	48.1	29.8
155	23.1	49.3	27.2
200	26.6	42	25.8
250	29.6	41.3	23

LanMarin® CAT 6A S/FTP

SHF1 UV

S/FTP

DNV-GL


Application

LAN cable, designed for ship- and offshore applications. Fire retardant.



Construction

Conductor	Stranded Plain Cu AWG23/7
Insulation	Cellular PE 1.48 ± 0.02 [mm]
No. of pairs	4
Colour code	IEC 60189-2
Individual Screen pairs	Al-/polyester tape
Screen	Tinned Cu-braid 60 [% optical coverage]
Jacket	Grey SHF1
O.D.	8,3 [mm]
Weight	80 [kg/km]



Specifications

Operating temperature	-40 – +80 [°C]
Conductor resistance	<70 [Ω/km]
Insulation resistance	5 [GΩ x km @ 20°C]
Test voltage	500 [V-AC]
Tensile strength	140 [N]
Capacitance	45 [pF/m]
Velocity factor	0.79
Min. bending radius installed	4 [x outer diam]

Norms

Halogenfree, max content corrosive and toxic gases	IEC 60754-1 862
Design and testing standards	IEC 61156-5 EN 50288-1
Sheathing material	IEC 60092-360 (359)
Flame retardant	3005
Smoke emission	IEC 61034-1, -2
UV-resistant	ASTM G 154
Certification	DNV-GL



Attenuation for Cat 6A S/FTP

Part No. 1089687



LanMarin Cat 6A is also approved by DNV-GL and available with solid conductors

Attenuation

Frequency (MHz)	Attenuation Max. (dB/100m)	Return Loss (dB/100m)	NEXT (dB/100m)	PS-NEXT (dB/100m)	ELFEXT (dB(100m))
1	1.8	25	95		90
10	5.4	30	92		87
16	6.7	30	90		86
31	9.6	30	87		81
100	17.5	27	84		72
155	22.8	26	83		68
200	24.8	25	82		65
400	35.9	22	80		59
500	40.2	21	79		57

LanMarin® CAT 7 SSTP

S/FTP - Flexible
UV resistant, SHF1
DNV-GL, ABS


Application

High performance offshore LAN cable with flexible conductor, AWG23/7. Compliant with the category 7 standards, requiring bandwidths up to 600MHz. Foil screened pairs with an overall braid. Tested for high-frequency and transmission measurements for class F-link.



Construction

Conductor	0.28 [mm ²] Stranded Plain Cu AWG23/7
Insulation	Cellular PE Ø=1.5 [mm]
No. of pairs	4
Colour code	IEC 60189-2
Individual Screen pairs	Al-/polyester tape
Overall Screen	Tinned Cu-braid
Jacket	Black SHF1
O.D.	8±0.20 [mm]
Weight	97 [kg/km]
Jacket marking	NEK Kabel LanMarin-SSTP Flex 4x2x23AWG Cat. 7 LSZH-IEC60332-3-22



Specifications

Operating temperature	-40 to +80 [°C]
Characteristic impedance	100±5 [Ω @ 100 MHz]
Insulation resistance	≥ 500 [MΩ x km]
Test voltage	1 [kV]
Velocity factor	0,78
Min. bending radius	15 [x outer diam]
Min. bending radius flexible	20 [x outer diam]



Norms and Attenuation for Cat 7 SSTP

Norms

Halogenfree, max content corrosive and toxic gases	IEC 60754-2
Design and testing standards	IEC 61156-5 EN 50288-4-2
Sheathing material	IEC 60092-360 (359)
Flame retardant	IEC 60332-1
Fire retardant	IEC 60332-3-22
Weather resistant	IEC 60502 EN ISO 11507
Oil and fuel, hydrocarbons resistant	IEC 60811
Smoke emission	IEC 61034-1, -2
UV-resistant	ASTM G 154
Certification	DNV-GL, ABS

Part No.	1089726
----------	---------



Also look for alternative jacket colours and arctic grade construction in Variants.



Attenuation

Frequency (MHz)	Attenuation Max. (dB/100m)	Return Loss (dB/100m)	NEXT (dB/100m)
1	2,2	35	100
4	3,8	31	100
10	5,9	38	95
16	7,4	32	90
20	8,4	32	90
34,25	10,5	31	90
62,5	15,3	27	85
100	18,1	34	82
155	23,2	28	80
200	26,6	25	77
300	33,3	23	71
600	50,1	21	67

LanMarin® CAT 7 SSTP MUD

UV resistant
SHF2
DNV-GL, ABS

Application

LAN cable designed and tested for ship- and offshore applications. In-door/out-door installation. Resistant to chemicals, MUD, UV radiation and harsh weather conditions. Flame retardant. An extra inner sheath provides additional fire protection. Tested for class F-link high frequencies transmission.



Construction

Conductor	0.28 [mm ²] Stranded Plain Cu AWG23/7
Insulation	Cellular PE Ø=1,55 [mm]
No. of pairs	4
Colour code	IEC 60189-2
Individual Screen pairs	Al-/polyester tape
Fire resistant barrier	Fire barriere tape
Overall Screen	Tinned Cu-braid
Jacket	Black SHF2
O.D.	10±0.2 [mm]
Weight	120 [kg/km]



Specifications

Operating temperature	-40 to +80 [°C]
Characteristic impedance	100 ± 5 [Ω]
Insulation resistance	≥ 500 [MΩ x km]
Test voltage	1 [kV-1min.]
Min. bending radius installed	31 [mm]



Attenuation for Cat 7 SSTP MUD

Norms

Halogenfree, max content corrosive and toxic gases	IEC 60754-2
Design and testing standards	DNV TAP 6-800 App.A;827.50-2 IEC 61156-5 EN 50288-4-2 IEC 60092-350
Fire retardant	IEC 60332-3-22 Cat.A
Weather resistant	IEC 60502
MUD resistant	NEK TS 606 F5
UV-resistant	ASTM G 154 ASTM D 4587 ASTM D 2565 92A
Certification	DNV-GL, ABS

Part No.	1089699
----------	---------

Frequency (MHz)	Attenuation Max.(acc.EN) (dB/100m)	NEXT (dB/100m)	ACR (dB/100m)
1	2,2	100	35
4	3,8	100	31
10	5,9	95	38
16	7,4	90	32
20	8,4	90	32
31,25	10,5	90	31
62,5	15,3	85	27
100	18,1	82	34
155	23,2	80	28
200	26,6	77	25
300	33,3	71	23
600	50,1	67	21

RS 422 Marine ARM

SHF1

100Ω

1, 2 and 4 pairs

DVN-GL

Application

4 pairs armoured marine cable for monitoring oil wells and linking POS terminals, to alarm systems, motion control and HVAC controls. Extend capability transceivers offer data rates up to 100 Mbps and up to 256 nodes, as well as 2500 VRMS isolation and fault protection up to ± 60 V Installations up to 1200m.




Construction

Conductor	0.22 [mm²] Stranded Tinned Cu AWG 24 (7x0.20mm)
Insulation	Low density PE
No. of pairs	1, 2 or 4
Colour code	IEC 60189-2
Screen	> 80% [% optical coverage]
Overall Screen	Al-polyester tape
Inner jacket	SHF1
Armour alt.1	Galvanised steel wire braid
Armour alt.2	Tinned Cu-braid
Armour alt.3	Bronze wire braid
Outer Jacket	Halogen free compound SHF1
O.D.	See table [mm]
Weight	See table [kg/km]

Jacket marking

NEK Kabel date RS422SHF1 ARMOURED MARINE CABLE 24 AWG 100 OHM IEC 60332-3-22 CAT A - TK

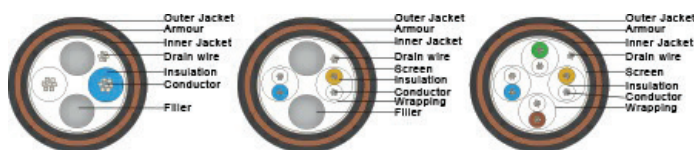

Specifications

Operating temperature	-40 – +70 [°C]
Characteristic impedance	100 ± 15 [Ω]
Operating voltage	100 [V]
Conductor resistance	>90 [Ω/km]
Test voltage	2000 [V-DC]
Insulation resistance drainwire - conductor	≥ 10 [MΩ x km]
Attenuation	28 dB/km



Norms for RS 422

Norms

Halogenfree, max content corrosive and toxic gases	IEC 60754-1, -2
Design and testing standards	Work area wiring IEC 61156-6
Sheathing material	IEC 60092-360 (359)
Flame retardant	IEC 60332-1
Fire retardant	IEC 60332-3-22 Cat.A
Weather resistant	ASTM G 154, ASTM D 4587, EN ISO 11507
Ozone resistant	DIN VDE 0472 part 805 B
Smoke emission	IEC 61034-1, -2
UV-resistant	ASTM G 154
Certification	DNV-GL

Part No.	1 pair; 1089603 2 pairs; 1089604 4 pairs; 1089605
----------	---

Number of pairs	Diam. inner jacket [mm]	Diam. outer jacket [mm]	Weight app. [kg/km]	Part no.
1 x 2 x AWG24	5,0	8,8	140	1089603
2 x 2 x AWG24	6,6	10,5	170	1089604
4 x 2 x AWG24	7,0	11,0	200	1089605

RS 485 Marine ARM

Flexible 1, 2 or 4 pairs

SHF1

120Ω

DNV-GL


Application

Armoured marine cable for monitoring oil wells and linking POS terminals, to alarm systems, motion control and HVAC controls. Extended capability transceivers offer data rates up to 100Mbps and up to 256 nodes, as well as 2500 VRMS isolation and fault protection up to ± 60V. Installations up to 1200 m.



Construction

Conductor	0.22 [mm ²] Stranded Tinned Cu AWG 24 (7x0.20mm)
Insulation	Cellular PE
No. of pairs	1, 2 or 4
Colour code	IEC 60189-2
Screen	Al-polyester tape 100 [% optical coverage]
Screen 2	Cu- braid 85 [% optical coverage]
Inner jacket	SHF1
Armour alt.1	Bronze wire braid (BWB)
Armour alt.2	Tinned Cu-braid (TWB)
Armour alt.3	Galvanised steel wire braid (GSWB)
Jacket	Black SHF1
O.D.	See table [mm]
Weight	See table [kg/km]
Jacket marking	Date RS485 LSZH ARMOURED MARINE CABLE 120ohm IEC 60332-3-22

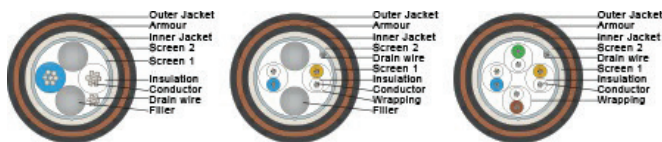

Specifications

Operating temperature	-40 to +70 [°C]
Characteristic Impedance @ 1MHz	120±15 [Ω]
Operating voltage	100 [V]
Conductor resistance	<90 [Ω/km]
Insulation resistance	≥ 1 [GΩ x km]
Test voltage	2000 [V-DC 1min.]
Capacitance	42 [pF/m]
Min. bending radius	10 [x outer diam]

Part No.	See table
----------	-----------



Norms for RS 485 ARM

Norms

Halogenfree, max content corrosive and toxic gases	IEC 60754-1, -2 862
Design and testing standards	Work area wiring IEC IEC 61156-6
Sheathing material	IEC 60092-360 (359)
Flame retardant	IEC 60332-1
Fire retardant	IEC 60332-3-22 Cat.A
Smoke emission	IEC 61034-1, -2
UV-resistant	ASTM G 154
Certification	DNV-GL

Number of pairs	Diam. inner jacket [mm]	Diam. outer jacket [mm]	Weight app. [kg/km]	Part no.
1 x 2 x AWG24 BWB	5,8	9,5	160	1032395
2 x 2 x AWG24 BWB	7,3	11,2	190	1032396
4 x 2 x AWG24 BWB	8,0	12,0	230	1032397

RS 485 Marine ARM MUD

Flexible 1, 2 or 4 pairs

SHF2

120Ω

DNV-GL

Application


Armoured marine cable for monitoring oil wells and linking PSA terminals to alarm systems, motion control and HVAC controls. Extended capability transceivers offer data rates up to 100 Mbps and up to 256 nodes, as well as 2,500 VNMS isolation and fault protection up to ±60 V. Installations up to 1,200 m.



Construction

Conductor	0.22 [mm ²] Stranded Tinned Cu AWG 24 (7x0.20mm)
Drain wire	0.22 mm ² Tinned Cu
Insulation	Cellular PE
No. of pairs	1, 2 or 4
Colour code	IEC 60189-2
Screen	Cu-braid 85 [% optical coverage]
Inner jacket	SHF1
Armour alt.1	Bronze wire braid (BWB)
Armour alt.2	Tinned Cu-braid (TWB)
Armour alt.3	Galvanised steel wire braid (GSWB)
Jacket	Black Halogenfree and MUD resistant thermoset compound
O.D.	See table [mm]
Weight	See table [kg/km]

Jacket marking
 NEK Kabel date RS485 ARMoured MARINE CABLE 24 AWG 120 OHM IEC 60332-3-22 CAT A-TK

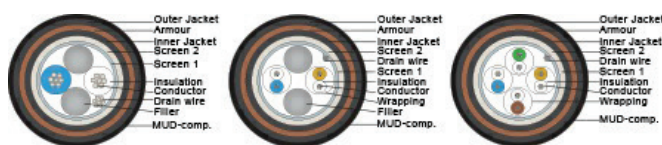

Specifications

Operating temperature	-40 – +70 [°C]
Characteristic Impedance @ 1MHz	120 ± 15 [Ω]
Operating voltage	100 [V]
Conductor resistance	<90 [Ω/km]
Insulation resistance	>1 [GΩ x km]
Test voltage	2 [kV]
Capacitance	42 [pF/km]



Norms for RS 485 ARM MUD

Norms

Halogenfree, max content corrosive and toxic gases	IEC 60754-1, -2
Design and testing standards	Work area wiring IEC 61156-6
Sheathing material	IEC 60092-360 (359)
Flame retardant	IEC 60332-1
Fire retardant	IEC 60332-3-22 Cat.A
Smoke emission	IEC 61034-1, -2
MUD resistant	NEK TS 606 F5
UV-resistant	ASTM G 154
Certification	DNV-GL

Number of pairs	Diam. inner jacket [mm]	Diam. outer jacket [mm]	Weight app. [kg/km]
1	5.8	10.5	200
2	7.3	12.2	230
4	8.0	13.0	270

RG 58C/U Marine SHF1

50 Ω

SHF1

DNV-GL, ABS


Application

Low smoke and halogen free coaxial cable for data transmission. The cable can also be used as antenna cable for mobile phones. Also available MUD-resistant version is for offshore use.



Construction

Conductor	Extra flexible tinned Cu 19 x 0.18 [mm]
Dielectricum	Low density PE $\varnothing=2,95\pm 0,10$ [mm]
Screen	Al + polyester + Al tape 100 [% optical coverage]
Screen 2	Tinned Cu braid 93 [% optical coverage] 144 x 0,1 [mm]
Jacket	Black SHF1
Outer diam	5,00 \pm 0,10 [mm]
Weight	42 [kg/km]



Specifications

Operating temperature	-40 - +70
Characteristic impedance	50 \pm 2 [Ω]
Braid Resistance	14 [Ω/km]
Conductor resistance	36,5 [Ω/km]
Capacitance	100 [pF/m]
Velocity factor	0,66
Min. bending radius	5 [x outer diam]
Min. bending radius flexible	10 [x outer diam]

Norms

Halogenfree, max content corrosive and toxic gases	IEC 60754-1, IEC 60754-2
Flame retardant	IEC 60332-1
Fire retardant	IEC 60332-3-22
Part No.	1092436



RG 58C/U Marine MUD

50Ω**SHF2 MUD resistant jacket****DNV-GL, ABS**


Application

Coaxial cable for ship- and offshore applications. Electrical data in compliance with MIL C-17/F.



Construction

Conductor	Extra flexible Tinned Cu 19 x 0.18 [mm]
Dielectricum	Low density PE 2.95 ± 0.10 [mm]
Screen	Al + polyester + Al tape 100 [% optical coverage]
Screen 2	Tinned Cu braid 93 [% optical coverage] 144 x 0,1 [mm]
Jacket	Black SHF2
Outer diam	7± 0.15 [mm]
Weight	53 [kg/km]



Operating temperature	-40 – + 70 [°C]
Characteristic impedance	50 ± 2 Ω
Braid Resistance	14 [Ω/km]
Conductor resistance	36.5 [Ω/km]
Test voltage	4 [kV]
Capacitance	100 [pF/m]
Velocity factor	0.66
Attenuation	See table RG 58 C/U Marine, Prod.no. 1092436
Min. bending radius	5 [x outer diam]
Min. bending radius flexible	10 [x outer diam]

Norms

Halogenfree, max content corrosive and toxic gases	IEC 60754-1, -2 NES 713
Design and testing standards	IEC 60096-0-1 Ed 3
Sheathing material	IEC 60092-360 (359)
Flame retardant	IEC 60332-1
Fire retardant	IEC 60332-3-24 Cat.C
Smoke emission	IEC 61034-2
MUD resistant	NEK TS 606 F5
Certification	DNV-GL
Part No.	1092438

RG 58C/U Marine ARM

50Ω

Al-tape + Cu braid

Galvanised steel wire armour

SHF1

DNV-GL

Application

Coaxial communications cable for ship- and offshore use. Electrical data in compliance with MIL C-17



Construction

Conductor	Extra flexible 19 x 0,18 [mm]
Dielectricum	Low density PE 2.95 ± 0.10 [mm]
Screen	Al-polyester-Al-tape 100 [% optical coverage]
Screen 2	Tinned Cu braid 93 [% optical coverage]] 144 x 0,1 [mm] [mm]
Inner jacket	SHF1
Armour alt.1	Galvanised steel wire braid
Armour alt.2	Tinned Cu-braid
Armour alt.3	Bronze wire braid
Jacket	SHF1
Outer diam	7.5±0,20 [mm]

Specifications

Operating temperature	-40 – 70 [°C]
Characteristic impedance	50 ± 2 [Ω]
Braid Resistance	14 [Ω/km]
Conductor resistance	36.5 [Ω/km]
Capacitance	100 [pF/m]
Min. bending radius	5 [x outer diam]
Min. bending radius flexible	10 [x outer diam]

Norms

Halogenfree, max content corrosive and toxic gases	IEC 60754-1, -2
Design and testing standards	IEC 60096-0-1 Ed 3
Sheathing material	IEC 60092-360 (359)
Flame retardant	IEC 60332-1
Fire retardant	IEC 60332-3-22 Cat.A
Smoke emission	IEC 61034-1, -2
Certification	DNV-GL, ABS

Part No.	1092437
----------	---------



Tables for RG 58 C/U Marine

Attenuation

Frequency (MHz)	Attenuation Max. (dB/100m)
5	3,0
10	4,0
50	9,4
100	13,0
200	18,6
300	23,3
500	31,2
600	34,7
800	41,0
1000	46,8
1350	56,6
1500	60,6
1750	66,9
2150	76,9
2250	78,4
2500	83,5
2750	86,5
3000	89,5

Structural return loss dB

MHz	dB
30 - 300	> 28
300 - 600	> 27
600 - 1000	> 25
1000 - 2000	> 20
2000 - 3000	> 18

Screening effectiveness IEC 61196-1

MHz	dB
100 - 900	> 90
900 - 2000	> 80
2000 - 3000	> 70

RG 213 U Marine

50Ω

Flexible, SHF1

DNV-GL, ABS


Application

Coaxial cable for ship- and offshore environments. VHF/UHF equipment. Electrical specifications in compliance with MIL C-17/F



Construction

Conductor	Stranded Plain Cu 7 x 0.75 [mm]
Dielectricum	Low density PE 7.25 ± 0.18 [mm]
Screen	Al + polyester + Al tape 100 [% coverage]
Screen 2	Cu- braid 96 [% optical coverage]
Jacket	Black SHF1
O.D.	10.3 ± 0.18 [mm]
Weight	167 [kg/km]



Specifications

Operating temperature	-40 – +70 [°C]
Characteristic impedance	50 ± 2 Ω
Braid Resistance	4.4 [Ω/km]
Conductor resistance	6 [Ω/km]
Test voltage	5.5 [kV]
Capacitance	100 [pF/m]
Velocity factor	0.66
Min. bending radius	5 [x outer diam]
Min. bending radius flexible	10 [x outer diam]

Norms

Halogenfree, max content corrosive and toxic gases	IEC 60754-1, -2
Design and testing standards	IEC 60096-0-1 Ed 3
Sheathing material	IEC 60092-360 (359)
Flame retardant	IEC 60332-1
Fire retardant	IEC 60332-3-22 Cat.A
Smoke emission	IEC 61034-2
Certification	DNV-GL, ABS
Part No.	1092440



RG 213 U Marine MUD

50Ω**Flexible****SHF2, MUD resistant jacket****DNV-GL, ABS**


Application

Coaxial cable for ship- and offshore environments. VHF/UHF equipment. Electrical specifications in compliance with MIL C-17/F.



Construction

Conductor	Stranded Plain Cu 7 x 0.75 [mm]
Dielectricum	LDPE 7.25 ± 0.18 [mm]
Screen	Al + polyester + Al tape 100 [% coverage]
Screen 2	Cu- braid 96 [% optical coverage]
Jacket	Black SHF1
Outer Jacket	Black SHF2
O.D.	12.80 ± 0.18 [mm]
Weight	182 [kg/km]



Specifications

Operating temperature	-40 – +70 [°C]
Characteristic impedance	50 ± 2 Ω
Braid Resistance	4.4 [Ω/km]
Conductor resistance	6 [Ω/km]
Test voltage	5.5
Capacitance	100 [pF/m]
Velocity factor	0.66
Min. bending radius	5 [x outer diam]
Min. bending radius flexible	10 [x outer diam]

Norms

Halogenfree, max content corrosive and toxic gases	IEC 60754-1, -2
Design and testing standards	IEC 60096-0-1 Ed 3
Sheathing material	IEC 60092-360 (359)
Flame retardant	IEC 60332-1
Fire retardant	IEC 60332-3-24
Smoke emission	IEC 61034-2
MUD resistant	NEK TS 606 F5
Certification	DNV-GL, ABS
Part No.	1092442

RG 213 U Marine ARM

50Ω

Flexible, SHF1

DNV-GL, ABS


Application

Armoured coaxial cable for ship- and offshore applications. VHF/UHF equipment. Electrical specifications in compliance with MIL C-17/F. The steel braid meets EU EMC requirements. Identical to RG 215 U.



Construction

Conductor	Stranded Plain Cu 7 x 0.75 [mm]
Dielectricum	Low density PE 7.25 ± 0.18 [mm]
Screen	Al + polyester + Al tape 100 [% optical coverage]
Screen 2	Cu- braid 96 [% optical coverage]
Inner jacket	SHF1
Armour alt.1	Galvanised steel wire braid 144 x 0.24 mm
Armour alt.2	Tinned Cu-braid 144 x 0.24 mm
Armour alt.3	Bronze wire braid 144 x 0.24 mm
Jacket	Black SHF1
O.D.	13.50 ± 0.20 [mm]
Weight	295 [kg/km]



Specifications

Operating temperature	-40 – +70 [°C]
Characteristic impedance	50 ± 2 Ω
Braid Resistance	4.4 [Ω/km]
Conductor resistance	8 [Ω/km]
Test voltage	5.5 [kV]
Capacitance	100 [pF/m]
Velocity factor	0.66
Min. bending radius	5
Min. bending radius flexible	10

Norms

Halogenfree, max content corrosive and toxic gases	IEC 60754-1, -2
Design and testing standards	IEC 60096-0-1 Ed 3 IEC 61196-1-100
Sheathing material	IEC 60092-360 (359)
Flame retardant	IEC 60332-1
Fire retardant	IEC 60332-3-22 Cat.A
Smoke emission	IEC 61034-1, -2
Part No.	1092441 (GSWB)



RG 213 U Marine ARM MUD

50Ω**Flexible, SHF2****DNV-GL, ABS**

Application

Armoured coaxial cable for ship- and offshore applications. VHF/UHF equipment. Electrical specifications in compliance with MIL C-17/F. The steel braid meets EU EMC requirements. Identical with RG 215 U.



Construction

Conductor	Stranded Plain Cu
Dielectricum	Low density PE 7.25 ± 0.18 [mm]
Screen	Al + polyester + Al tape 100 [% optical coverage]
Screen 2	Cu- braid 96 [% optical coverage]
Inner jacket	SHF1
Armour alt.1	Galvanised steel wire braid 144 x 0.24 mm
Armour alt.2	Tinned Cu-braid 144 x 0.24 mm
Armour alt.3	Bronze wire braid 144 x 0.24 mm
Jacket	Black SHF2
O.D.	17.0 ± 0.2 [mm]
Weight	360 [kg/km]
Jacket marking	NEK Kabel - RG213U Marine SHF2 ARMoured-DNV-IEC60332-3-24



Part No.	1092443 (GSWB)
----------	----------------

Specifications

Operating temperature	-40 – +70
Characteristic impedance	50 ± 2 Ω
Braid Resistance	4.4 [Ω/km]
Conductor resistance	8 [Ω/km]
Test voltage	5.5 [kV]
Capacitance	100 [pF/m]
Velocity factor	0.66
Min. bending radius	5 [x outer diam]
Min. bending radius flexible	10 [x outer diam]

Norms

Halogenfree, max content corrosive and toxic gases	IEC 60754-1, -2
Design and testing standards	IEC 60096-0-1 Ed 3
Sheathing material	IEC 60092-360 (359)
Flame retardant	IEC 60332-1
Fire retardant	IEC 60332-3-24
Smoke emission	IEC 61034-1, -2
MUD resistant	NEK TS 606 F5

Tables for RG 213

Attenuation nominal, max 105%

Frequency MHz	Attenuation dB/100m
5	1.1
10	1.5
50	3.8
100	5.5
200	8
300	10.1
500	13.2
800	17.5
1000	20
1500	25.3
2150	31.5
2500	34.7
2750	36.7
3000	38.3

Structural return loss

MHz	dB
30 – 300	>31
300 – 600	>28
600 – 1000	>20
1000 – 2000	>24
2000 – 3000	>22

Screen effectiveness IEC 61196-1

MHz	dB
100 – 900	>90
900 – 2000	>80
2000 – 3000	>70



RG 214 U Marine

Trippelshielded**50Ω****SHF1****DNV-GL, ABS**


Application

Coaxial cable for ship and other marine environments for VHF/UHF equipment. MIL 17-C/75.



Construction

Conductor	Stranded Silvercoated Cu 7 x 0,75 [mm]
Dielectricum	Low density PE 7,25 ± 0,18 [mm]
Screen	Al - polyester tape 100 [% optical coverage]
Screen	Silvercoated Cu braid 94 [% optical coverage]
Screen 2	Silvercoated Cu braid 98 [% optical coverage]
Jacket	Black SHF1
O.D.	10.8 ± 0.18 [mm]
Weight	206 [kg/km]
Jacket marking	NEK Kabel date RG214U Marine



Specifications

Operating temperature	-40 – +70 [°C]
Characteristic impedance	50±2 [Ω]
Braid Resistance	4.2 [Ω/km]
Conductor resistance	6 [Ω/km]
Test voltage	5.5 [kV]
Capacitance	100 [pF/m]
Min. bending radius	15 [x outer diam]

Norms

Halogenfree, max content corrosive and toxic gases	IEC 60754-1, -2
Design and testing standards	IEC 60096-0-1 Ed 3
Sheathing material	IEC 60092-360 (359)
Flame retardant	IEC 60332-1
Fire retardant	IEC 60332-3-22 Cat.A
Smoke emission	IEC 61034-2
Certification	DNV-GL, ABS
Part No.	1092444

RG 214 U Marine MUD

50 Ω

MUD resistant jacket, SHF2

DNV-GL, ABS


Application

Coaxial cable for ship and other marine environments for VHF/UHF. Electrical data in compliance with MIL C-17//75



Construction

Conductor	Stranded Silvercoated Cu 7 x 0.75 [mm]
Dielectricum	Low density PE 7.25 ± 0.75 [mm]
Screen	Al-polyester-Al tape 100 [% optical coverage]
Screen	Silvercoated Cu braid 94 [% optical coverage]
Screen 2	Silvercoated Cu braid 98 [% optical coverage]
Jacket	Black SHF1
Outer Jacket	Black SHF2
O.D.	12.9 ± 0,2 [mm]
Weight	229 [kg/km]
Jacket marking	NEK Kabel date RG214U Marine-MUD NEK 606



Specifications

Operating temperature	-40 - +70 [°C]
Braid Resistance	4.2 [Ω/km]
Conductor resistance	6 [Ω/km]
Test voltage	5,5 [kV]
Capacitance	100 [pF/m]
Impedance	50±2 [Ω]
Min. bending radius	15 [x outer diam]

Norms

Halogenfree, max content corrosive and toxic gases	IEC 60754-1, -2
Design and testing standards	IEC 60096-0-1 Ed 3
Sheathing material	IEC 60092-360 (359)
Flame retardant	IEC 60332-1
Fire retardant	IEC 60332-3-24 Cat.C
Smoke emission	IEC 61034-2
MUD resistant	NEK TS 606 F5
Certification	DNV-GL
Part No.	1092446



RG 214 U Marine ARM

50Ω
Armoured, SHF1
DNV-GL, ABS


Application

Coaxial cable for ship and other marine environments for VHF/UHF equipment. Electrical data in compliance with MIL C-17/F, EMC protective. Replaces RG 215 and have better values.



Construction

Conductor	Stranded Plain Cu 7 x 0,75 [mm]
Dielectricum	Low density PE 7,25 ± 0,18 [mm]
Screen	Al-polyester-Al tape 100 [% optical coverage]
Screen	Silvercoated Cu braid 94 [% optical coverage]
Screen 2	Silvercoated Cu braid 98 [% optical coverage]
Inner jacket	SHF1
Armour alt.1	Galvanised steel wire braid
Armour alt.2	Tinned Cu-braid
Armour alt.3	Bronze wire braid
Jacket	Black SHF1
O.D.	13.5 [mm]
Weight	323.8 [kg/km]



Specifications

Operating temperature	-40 - +70 [°C]
Characteristic impedance	50±2 [Ω]
Braid Resistance	4.2 [Ω/km]
Conductor resistance	6 [Ω/km]
Test voltage	5,5 [kV]
Capacitance	100 [pF/m]
Min. bending radius flexible	15 [x outer diam]

Norms

Halogenfree, max content corrosive and toxic gases	IEC 60754-2
Design and testing standards	IEC 60096-0-1 Ed 3
Sheathing material	IEC 60092-360 (359)
Flame retardant	IEC 60332-1
Fire retardant	IEC 60332-3-22 Cat.A
Smoke emission	IEC 61034-1, -2
Certification	DNV-GL. ABS
Part No.	1092445 (Steel wire armour) 1092462 (Tinned Cu wire armour)

RG 214 U Marine ARM MUD

50Ω

Armoured, SHF2

DNV-GL


Application

Coaxial cable for ship- and other marine environments for VHF/UHF equipment. Electrical data in compliance with MIL C-17/F. EMC protected.



Construction

Conductor	Stranded Plain Cu 7 x 0.75 [mm]
Dielectricum	Low density PE 7.25 ± 0.18 [mm]
Screen	Al-polyester-Al tape 100 [% optical coverage]
Screen	Silvercoated Cu braid 96 [% optical coverage]
Screen 2	Silvercoated Cu braid 98 [% optical coverage]
Inner jacket	SHF1 10.00 ± 0.18 [mm]
Armour alt.1	Galvanised steel wire braid
Armour alt.2	Tinned Cu-braid
Armour alt.3	Bronze wire braid
Jacket	Black SHF2
O.D.	17.0 ± 0.2 [mm]
Weight	399 [kg/km]
Jacket marking	NEK Kabel date RG214U Marine SHF1 ARMOURED DNV



Specifications

Operating temperature	-40 – +70 [°C]
Characteristic impedance	50 ± 2 Ω
Braid Resistance	4.2 [Ω/km]
Conductor resistance	6 [Ω/km]
Test voltage	5.5 [kV]
Capacitance	100 [pF/m]
Velocity factor	0.66
Min. bending radius	5 [x outer diam]
Min. bending radius flexible	10 [x outer diam]
Halogenfree, max content corrosive and toxic gases	IEC 60754-1, -2 NES 713
Sheathing material	IEC 60092-360 (359)
Flame retardant	IEC 60332-1
Fire retardant	IEC 60332-3-24
Smoke emission	IEC 61034-1, -2
MUD resistant	NEK TS 606 F5
Part No.	1092447



Tables for RG 214 cables

Attenuation nominal, max 105%

Frequency MHz	Attenuation dB/100m
5	1.1
10	1.5
100	5.4
300	9.9
500	12.9
800	17.2
1000	19.8
1500	24.8
2150	30.9
2500	34.0
3000	37.6
5500	55

Structural return loss

MHz	dB
30 – 300	>31
300 – 600	>28
600 – 1000	>27
100 – 2000	>24
2000 – 3000	>22

Screen effectiveness IEC 61196-1

MHz	dB
100 – 900	>90
900 – 2000	>80
2000 – 3000	>70

RG 215 Marine LSZH

LSZH
50 Ohm


Application

Coaxial cable for HF and communications equipment. Can be used in ship and offshore installations.
For approved type, see RG 213 U Marine ARM SHF1.



Construction

Conductor	Stranded Plain Cu 7 x 0.75 [mm]
Dielectricum	Gas injected PE
Screen	Cu-braid 97 [% optical coverage] 192 x 0.18 [mm]
Inner jacket	LSZH compound $\varnothing=10,3\pm 0,18$ [mm]
Armour	Galvanised steel wire braid 85% [optical cover] 144x0.24 [mm]
Outer Jacket	$\varnothing=13,3\pm 0,30$ [mm]
Weight	284 [kg/km]



Part No. 1092391

Specifications

Operating temperature	-40 - +70
Characteristic impedance	50±2 [Ω]
Braid Resistance	4 [Ω/km]
Conductor resistance	6 [Ω/km]
Capacitance	100 [pF/m]
Velocity factor	0,66
Attenuation	See table
Min. bending radius	5 [x outer diam]
Min. bending radius flexible	10 [x outer diam]

Attenuation

Frequency (MHz)	Attenuation Max. (dB/100m)
5	1,2
50	4,3
100	6,4
300	11,5
500	15,3
800	20,4
1000	23,2
1500	30,4
2150	38,9
2500	42,7
3000	48,9



RF 400

Low loss feeder cable
50Ω, double shielded
SHF1, UV, LSZH
Eq. LMR 400


Application

Replaces RG-8/9913 as short run antenna feeder or jumper assemblies. Connects RF receiver systems with antenna systems in ships, building tunnels and other underground installations. This product has better bending and handling properties, compared with cables with corrugated sheaths.



Construction

Conductor	Solid Copper-clad Al 2.74 [mm]
Dielectricum	Cellular PE 7.25 ± 0.18 [mm]
Screen	Al - PET - AL Tape
Screen	Tinned Cu-braid 90 [% optical coverage]
Jacket	Black SHF1
Outer diam	10.3 ± 0.18 [mm]
Weight	126.6 [kg/km]



Specifications

Operating temperature	-40 – +70 [°C]
Characteristic impedance	50 ± 3 [Ω]
Braid Resistance	5 [Ω/km]
Test Voltage	6 [kV AC]
Conductor resistance	4.7 [Ω/km]
Insulation resistance	5 [GΩ x km]
Frequency	Max 3000 MHz
Capacitance	80 [pF/m]
Velocity factor	0,84
Min. bending radius	5 [x outer diam]
Min. bending radius flexible	10 [x outer diam]
Halogenfree, max content corrosive and toxic gases	IEC 60754-1, -2
Design and testing standards	IEC 60096-0-1 Ed 3 IEC 61196-1-100
Sheathing material	IEC 60092-360 (359)
Flame retardant	IEC 60332-1
Fire retardant	IEC 60332-3-22 Cat.A
Smoke emission	IEC 61034-2
UV-resistant	ASTM G 154
Part No.	1092361

Norms and tables for RF 400

Attenuation nominal, max 105%

Frequency MHz	Attenuation dB/100m
5	0,9
10	1,2
50	2,5
100	3,6
200	5,3
400	7,9
500	9,0
600	10,0
800	11,7
1000	13,2
1350	15,8
1500	16,6
1750	18,7
2150	20,6
2250	21,2
2500	22,6
2750	23,8
3000	25,1
6000	38,7

Structural return loss

MHz	dB
30 – 300	< 29
300 – 600	< 26
600 – 1000	< 24
1000 – 2000	< 19
2000 – 3000	< 18

Screen effectiveness IEC 61196-1

MHz	dB
100 – 900	>95
900 – 2000	>85
2000 – 3000	>75



RF 400 Ultraflex

Flexible coaxial cable

Low Loss, double screen

50 Ω, SHF1, LSZH, UV

Eq. to LMR 400


Application

Double shielded coaxial cable designed for use in the broadcasting and telecommunication industry. Double shield means a 90 dB compared with typically 40 dB for a single shielded cable. Replaces RG 8. A variety of connectors is available for this product. Also used as jumper cable in communication networks for LF and UHF.



Construction

Conductor	Stranded Plain Cu 7x1,00 [mm]
Dielectricum	Gas injected PE 7,25 ± 0,18 [mm]
Screen	Al - PET - AL Tape
Screen	100 [% coverage]
Screen 2	Tinned Cu braid 90 [% optical coverage]
Jacket	Black LSZH SHF1
Outer diam	10,30 ± 0,18 [mm]
Weight	154,20 [kg/km]



Specifications

Operating temperature	-40 – +70 [°C]
Characteristic impedance	50 ± 3 [Ω]
Braid Resistance	5 [Ω/km]
Conductor resistance	3.0 [Ω/km]
Capacitance	80 [pF/m]
Velocity factor	0.84
Min. bending radius	5 [x outer diam]
Min. bending radius flexible	10 [x outer diam]

Norms

Halogenfree, max content corrosive and toxic gases	IEC 60754-1, -2
Design and testing standards	IEC 60096-0-1 Ed 3 IEC 61196-1-100
Sheathing material	IEC 60092-360 (359)
Flame retardant	IEC 60332-1-2
Fire retardant	IEC 60332-3-22 Cat.A
Smoke emission	IEC 61034-2
UV-resistant	ASTM G 154

Norms and tables for RF 400 Ultraflex

Part No. 1028860

Attenuation nominal, max 105%

Frequency MHz	Attenuation dB/100m
5	1,0
10	1,3
50	2,6
100	3,7
200	5,4
400	8,1
500	9,2
600	10,3
800	12,0
1000	13,5
1350	16,1
1500	17,0
1750	19,1
2150	21,0
2250	21,6
2500	23,1
2750	24,3
3000	25,6
6000	38,7

Structural return loss

MHz	dB
30 - 300	>27
300 - 600	>26
600 - 1000	>22
1000 - 2000	>18
2000 - 3000	>15

Screen effectiveness IEC 61196-1

MHz	dB
100 - 900	> 80
900 - 2000	>70
2000 - 3000	>60



RF LLF 1/2" Hiflex

Feeder cable

Jumper cable

50Ω

SHF1, UV

DNV-GL, ABS


Application

Low loss highly flexible feeder cable designed for broadband transmission from sources like radio antennas, radars, GPS devices, mobile phone antennas to distribution systems inside ships, tunnels, buildings and underground areas where RF signals normally cannot be received. The highly flexible design makes the product the best solution for installations which require small bending radius. RF LLF 1/2" Hiflex is the best choice, used as jumper cable. The combination of extra flexibility and low loss makes RF LLF 1/2" Hiflex the natural choice for most applications in RF networks.



Construction

Conductor	Corrugated copper tube 3.55 ± 0.04 [mm]
Dielectricum	Cellular PE 9.0 ± 0.20 [mm]
Screen	Helical corrugated Cu-tape 12.00 ± 0.25
Jacket	Black or grey SHF1
O.D.	13.70 ± 0.20 [mm]
Weight	190 [kg/km]
Jacket marking	NEK Kabel RF LLF 1/2"50 HIFLEX SHF1 Date, batch number and meter marked



Specifications

Operating temperature	-40 – +70 [°C]
Temperature @ installation	-20 – +50 [°C]
Recommended clamp spacing	1 [m]
Peak RF voltage	1.4 [kV]
Characteristic impedance	50 ± 2 Ω
Peak power rating	19,0 [kW]
Braid Resistance	3.70 [Ω/km]
Return Loss	23.1 [dB]
Conductor resistance	2.97 [Ω/km]
Max. load at installation	800 [N/mm²]
Insulation resistance	10 [GΩ x km]
Capacitance	82 [pF/m]
Min. bending radius	17 [mm]
Min. bending radius flexible	50 [mm]

Norms and tables for RF LLF 1/2" Hiflex

NEK offers connectors for RF LLF 1/2": Male, Part No. 65435N and Female, Part No. 65436N

Norms

Halogenfree, max content corrosive and toxic gases	IEC 60754-1, -2
Design and testing standards	IEC 60096-0-1 Ed 3 IEC 61196-1-100
Sheathing material	IEC 60092-360 (359)
Fire retardant	IEC 60332-3-22 Cat.A
Smoke emission	IEC 61034
UV-resistant	ASTM G 154
Certification	DNV-GL, ABS

Part No.	1028854-black, 1028856-grey
----------	-----------------------------

Frequency (MHz)	Nominal attenuation (dB/100m) max 105%	Power rating (kW)
30	1,70	4,8
100	3,18	2,6
150	4.08	2.1
400	6.60	1,2
450	7.20	1.2
500	7.32	1.1
600	8.10	0.99
700	8.75	0.91
800	9.50	0.85
900	11.00	0.77
960	10.55	0.77
1000	10.80	0.75
1200	11.90	0.68
1400	13.0	0.62
1600	14.0	0.58
1800	15.5	0.54
2000	16.5	0.51
2200	17.5	0.48
2400	18.3	0.46
2700	19.6	0.44
3000	21.0	0.40
3400	22.5	0.37
4000	24.0	0.34
5800	33.0	0.27



RF LLF 1/2" Hiflex MUD

Feeder Cable

Jumper Cable

50Ω

SHF2, UV, MUD

DNV-GL


Application

Low loss highly flexible feeder cable designed for broadband transmission from sources like radio antennas, radars, GPS devices, mobile phone antennas to distribution systems inside ships, tunnels, buildings and underground areas where RF signals normally cannot be received. The highly flexible design makes the product the best solution for installations which require small bending radius. RF LLF 1/2" Hiflex MUD is the best choice, used as jumper cable in areas exposed to chemicals. The combination of extra flexibility and low loss makes RF LLF 1/2" Hiflex the natural choice for most applications in RF networks.



Construction

Conductor	Corrugated copper tube 3.55 ± 0.04 [mm]
Dielectricum	Cellular PE 9.0 ± 0.25 [mm]
Screen	Helical corrugated Cu-tape
Jacket	Black SHF2 Halogenfree and MUD resistant thermoset compound
Outer diam	14.9 ± 0,2 [mm]
Weight	210 [kg/km]



Specifications

Operating temperature	-40 – +70 [°C]
Temperature @ installation	-20 – +50 [°C]
Recommended clamp spacing	1 [m]
Peak RF voltage	1.4 [kV]
Characteristic impedance	50 ± 2 Ω
Peak power rating	19 [kW]
Braid Resistance	3.7 [Ω/km]
Return Loss	23 [dB]
Conductor resistance	3 [Ω/km]
Max. load at installation	800 [N/mm²]
Insulation resistance	10 [GΩ x km]
Capacitance	82
Min. bending radius	17
Min. bending radius flexible	50

Norms and tables for RF LLF 1/2" Hiflex MUD

Norms

Halogenfree, max content corrosive and toxic gases	IEC 60754-1, -2
Design and testing standards	IEC 60096-0-1 Ed 3
Sheathing material	IEC 60092-360 (359)
Fire retardant	IEC 60332-3-24 Cat.C
Weather resistant	IEC 60502
Smoke emission	IEC 61034
MUD resistant	NEK TS 606
Part No.	1092482

Attenuation and Power rating

Frequency [MHz]	Nominal attenuation [dB/100m] max. 105%	Power rating [kW]
30	1.7	4.8
100	3.18	2.6
150	4.08	2.1
400	6.60	1.2
450	7.20	1.2
500	7.32	1.1
600	8.10	0.99
700	8.75	0.91
800	9.50	0.85
900	11.00	0.77
960	10.55	0.77
1000	10.80	0.75
1200	11.90	0.68
1400	13.0	0.62
1600	14.0	0.58
1800	15.5	0.54
2000	16.5	0.51
2200	17.5	0.48
2400	18.3	0.46
2700	19.6	0.44
3000	21.0	0.40
3400	22.5	0.37
4000	24.0	0.34
5800	33.0	0.27



RF LLF 1/2"

Feeder cable

50Ω

SHF1, UV

DNV-GL


Application

Low loss flexible feeder cable designed for broadband transmission from sources like radio antennas, radars, GPS devices, mobile phone antennas to distribution systems inside ships, tunnels, buildings and underground areas where RF signals normally cannot be received.



Construction

Conductor	Copper coated Al wire 4.80 ± 0.05 [mm]
Dielectricum	Cellular PE 12.10 ± 0.30 [mm]
Screen	Corrugated Cu tube 13.90 ± 0.25 [mm]
Jacket	Black or grey SHF1
Outer diam	16,40 ± 0,40 [mm]
Weight	250 [kg/km]
Jacket marking	NEK Kabel, RF LLF 1/2" 50 Date, batch number and meter marked



Specifications

Operating temperature	-40 – +70 [°C]
Inductance	0.19 [μH/m]
Screen resistance	<2.85 [Ω/km]
Peak RF voltage	1.8 [kV]
Characteristic impedance	50 ± 2 Ω
Peak power rating	31.8 [kW]
Conductor resistance	<1.60 [Ω/km]
Insulation resistance	10 [GΩ x km]
Capacitance	76 [pF/m]
Velocity factor	0.88
Max. power	31.8 [kW]

Norms

Halogenfree, max content corrosive and toxic gases	IEC 60754-1, -2
Sheathing material	IEC 60092-360 (359)
Fire retardant	IEC 60332-3-24 Cat.C + IEC 60332-3-22 Cat.A
Smoke emission	IEC 61034-1, -2
UV-resistant	ASTM G 154
Part No.	1028850-black, 1028857-grey

RF LLF 1/2" MUD

Feeder cable

50Ω

SHF2, MUD

DNV-GL


Application

Low loss feeder cable. designed for broadband transmission from sources like radio antennas, radars, GPS devices, mobile phone antennas to distribution systems inside ships, tunnels, buildings and underground areas where RF signals normally cannot be received. Chemical resistant SHF2 jacket.



Construction

Conductor	Copper coated Al wire 4.80 ± 0.05 [mm]
Dielectricum	Cellular PE 12.1 ± 0.3 [mm]
Screen	Corrugated Cu tube 13.90 ± 0.25 [mm]
Jacket	Black SHF2
O.D.	18.0 ± 0.2 [mm]
Weight	270 [kg/km]
Jacket marking	NEK Kabel RF LLF 1/2" MUD, date, metermarked.



Specifications

Operating temperature	-40 – +70 [°C]
Inductance	0.19 [μH/m]
Screen resistance	<2.4 [Ω/km]
Peak RF voltage	1.8 [kV]
Characteristic impedance	50 ± 2 Ω
Peak power rating	32 [kW]
Conductor resistance	<1.6 [Ω/km]
Insulation resistance	10 [GΩ x km]
Capacitance	76 [pF/m]
Velocity factor	0,88

**Norms and tables for RF LLF 1/2" MUD****Norms**

Halogenfree, max content corrosive and toxic gases	IEC 60754-1, -2
Design and testing standards	IEC 60096-0-1 Ed 3 IEC 61196-1-100
Sheathing material	IEC 60092-360 (359)
Flame retardant	3005
Fire retardant	IEC 60332-3-24 Cat.C
Smoke emission	IEC 61034-1, -2
MUD resistant	NEK TS 606 F5
UV-resistant	ASTM G 154

Part No.	1092481
----------	---------

Frequency [MHz]	Nominal attenuation [dB/100m] max. 105%	Power rating [kW]
30	1.66	6.9
50	2.01	5.3
88	2.51	4.0
100	2.65	3.7
200	3.58	2.6
300	4.31	2.1
400	4.93	1.8
450	5.1	1.7
500	5.49	1.6
700	6.48	1.3
800	7.10	1.3
900	7.30	1.25
1000	7.78	1.1
1400	9.24	0.9
1800	10.90	0.78
2000	11.50	0.76
2400	12.90	0.66
3000	14.50	0.58
3400	15.50	0.54
6000	21.5	0.39
8000	27.0	0.31

RF LLF 7/8" Hiflex

Feeder cable

Jumper cable

50Ω

SHF1, UV

DNV-GL


Application

Low loss highly flexible feeder cable designed for broadband transmission from sources like radio antennas, radars, GPS devices, mobile phone antennas to distribution systems inside ships, tunnels, buildings and underground areas where RF signals normally cannot be received. The highly flexible design makes the product the best solution for installations which requires small bending radius. The combination of extra flexibility and low loss makes this product the natural choice for most applications in RF networks. Attenuation values, nominal (max. 105%)



Construction

Conductor	Helical Corrugated copper tube 9.40 ± 0.20 [mm]
Dielectricum	Cellular PE 22.20 ± 0.30 [mm]
Screen	Corrugated Cu tube 24.90 ± 0.30
Jacket	Black SHF1
Outer diam	27.50 ± 0.20 [mm]
Weight	430 [kg/km]
Jacket marking	NEK Kabel RF LLF 7/8" Hiflex



Specifications

Operating temperature	-40 to +70 [°C]
Temperature flexible	-20 [°C]
Screen resistance	1,3 [Ω/km]
Recommended clamp spacing	1 [m]
Peak RF voltage	2,8 [kV]
Characteristic impedance	50 ± 2 Ω
Conductor resistance	2.5 [Ω/km]
Capacitance	74 [pF/m]
Velocity factor	0,88
Min. bending radius	90 [mm]
Min. bending radius flexible	120 [mm]

Part No.	1028855
----------	---------



Norms and tables for RF LLF 7/8" Hiflex

Norms

Halogenfree, max content corrosive and toxic gases	IEC 60754-1, -2
Sheathing material	IEC 60092-360 (359) SHF1
Fire retardant	IEC 60332-3-24 Cat.C
Smoke emission	IEC 61034
UV-resistant	ASTM G 154
Certification	DNV-GL

Attenuation and Power rating

Frequency [MHz]	Nominal attenuation [dB/100m] max. 105%	Power rating [kW]
10	<0,37	24
30	<0,63	14
50	<0,86	11
174	<1,64	5,6
200	<1,8	5,2
500	<2,89	3,2
800	<3,72	2,5
900	<4,00	2,3
960	<4,11	2,2
1600	<5,47	1,7
1800	<6,00	1,6
2000	<6,38	1,5
2200	<6,56	1,4
2400	<7,10	1,3
2600	<7,23	1,3
2800	<7,55	1,2
3000	<7,87	1,2
3400	<8,48	1,1
4000	<9,32	0,98
5000	<10,95	0,86

RF LLF 7/8" Hiflex MUD

Feeder cable

Jumper cable

50Ω

SHF2, MUD, UV

DNV-GL


Application

Low loss highly flexible feeder cable designed for use in areas exposed for chemical fluids. The cable carries broadband transmission from sources like radio antennas, radars, GPS devices, mobile phone antennas to distribution systems inside ships, offshore platforms, tunnels, buildings and underground areas where RF signals normally cannot be received. The highly flexible design makes the product the best solution for installations which requires small bending radius. The combination of extra flexibility and low loss makes this product the natural choice for most applications in RF networks. Attenuation values are nominal (max 105%).



Construction

Conductor	Helical Corrugated copper tube 9.4 ± 0.20 [mm]
Dielectricum	Cellular PE 22.20 ± 0.30 [mm]
Screen	Corrugated Cu-tube 24.90 ± 0.30
Jacket	Black SHF2 Halogenfree and MUD resistant thermoset compound
Outer diam	29.5 ± 0.2 [mm]
Weight	450 [kg/km]



Specifications

Operating temperature	-40 – + 70 [°C]
Temperature flexible	-20 [°C]
Screen resistance	1.3 [Ω/km]
Recommended clamp spacing	1 [m]
Peak RF voltage	2.8 [kV]
Characteristic impedance	50 ± 2 [Ω]
Conductor resistance	2.5 [Ω/km]
Capacitance	74 [pF/m]
Velocity factor	0,88
Min. bending radius	90 [mm]
Min. bending radius flexible	120 [mm]

Part No.	1092485
----------	---------



Norms and tables for RF LLF 7/8" Hiflex MUD

Norms

Halogenfree, max content corrosive and toxic gases	IEC 60754-1, -2
Sheathing material	IEC 60092-360 (359)
Fire retardant	IEC 60332-3-24 Cat.C
Smoke emission	IEC 61034
MUD resistant	NEK TS 606
UV-resistant	ASTM G 154
Certification	DNV-GL

Attenuation and Power rating

Frequency [MHz]	Nominal attenuation [dB/100m] max. 105%	Power rating [kW]
10	0.37	24
30	0.63	14
50	0.86	11
174	1.64	5.6
200	2.8	5.2
300	2.89	3.2
800	3.72	2.5
900	4.00	2.3
960	4.11	2.2
1600	5.47	1.7
1800	6.00	1.6
2000	6.38	1.5
2200	6.56	1.4
2400	7.10	1.3
2600	7.23	1.3
2800	7.55	1.2
3000	7.87	1.2
3400	8.48	1.1
4000	9.32	0.98
5000	10.95	0.86

RF LLF 7/8" SHF1

Feeder cable

50Ω

SHF1, UV

DNV-GL


Application

Low loss flexible feeder cable designed for broadband transmission from sources like radio antennas, radars, GPS devices, mobile phone antennas to distribution systems inside ships, tunnels, buildings and underground areas where RF signals normally cannot be received.



Construction

Conductor	Cu-tube 9.45 ± 0.10 [mm]
Dielectricum	Cellular PE 23.20 ± 0.30 [mm]
Screen	Corrugated Cu tube 25.40 ± 0.30 [mm]
Jacket	Black or grey SHF1 UV-resistant
Outer diam	28.5 ± 0.40 [mm]
Weight	450 [kg/km]
Jacket marking	NEK Kabel, RF LLF 7/8" 50 Date, batch number and meter marked



Specifications

Operating temperature	-40 – +70 [°C]
Screen resistance	<1.6 [Ω/km]
Recommended clamp spacing	1 [m]
Peak RF voltage	3.3 [kV]
Peak power rating	92.0 [kW]
Characteristic impedance	50 ± 2 [Ω]
Conductor resistance	1.30 [Ω/km]
Frequency	Max 5,000 MHz
Capacitance	74.2 [pF/m]
Velocity factor	0.88
Min. bending radius	150 [mm]
Min. bending radius flexible	275 [mm]

Part No.	1028851-black, 1028858-grey
----------	-----------------------------

RF LLF 7/8" MUD

Feeder cable
50Ω
SHF2, MUD
DNV-GL


Application

Low loss flexible feeder cable designed for broadband transmission from sources like radio antennas, radars, GPS devices and mobile phone antennas to distribution systems inside ships, tunnels, buildings and underground areas where RF signals normally cannot be received.



Construction

Conductor	Cu-tube 9.45 ± 0.10 [mm]
Dielectricum	Cellular PE 23.20 ± 0.30 [mm]
Screen	Corrugated Cu tube 25.40 ± 0.30 [mm]
Jacket	Black SHF2
Outer diam	30 [mm]
Weight	470 [kg/km]
Jacket marking	NEK Kabel RF LLF 7/8" MUD



Specifications

Operating temperature	-40 – +70 [°C]
Screen resistance	1.28 [Ω/km]
Recommended clamp spacing	1 [m]
Peak RF voltage	3.3 [kV]
Peak power rating	92 [kW]
Characteristic impedance	50 ± 2 [Ω]
Conductor resistance	1.3 [Ω/km]
Frequency	Max 5,000 MHz
Capacitance	74.2 [pF/m]
Velocity factor	0,88
Min. bending radius flexible	275 [mm]
Min. bending radius installed	150 [mm]

Part No.	1092483
----------	---------

Norms and tables for RF LLF 17/8" MUD

Norms


Halogenfree, max content corrosive and toxic gases	IEC 60754-1, -2
Design and testing standards	IEC 60096-0-1 Ed 3
Sheathing material	IEC 60092-360 (359)
Flame retardant	IEC 60332-1
Fire retardant	IEC 60332-3-24 Cat.C
Smoke emission	IEC 61034
MUD resistant	NEK TS 606
UV-resistant	ASTM G 154
Certification	DNV-GL

Attenuation and Power rating

Frequency [MHz]	Nominal attenuation [dB/100m] max. 105%	Power rating [kW]
50	0,70	11,0
88	1,00	8,5
100	1,12	8,0
200	1,50	5,6
300	1,90	4,5
450	2,40	3,6
500	2,50	3,4
700	2,95	2,8
800	3,00	2,6
900	3,40	2,5
1000	3,70	2,3
1400	4,45	1,9
1800	5,09	1,7
2000	5,20	1,6
2400	5,90	1,4
3000	6,90	1,2
3400	7,93	1,2
4000	8,50	1,0
5000	9,26	0,9



N-Male and Female for RG 213

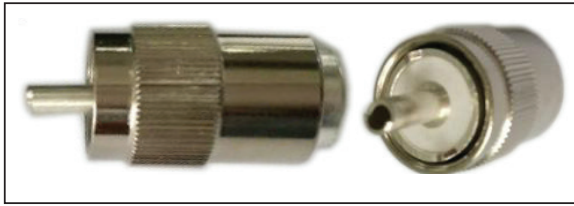

UHF N-Male for RG 213

J213
50Ω

Application:

Straight N Male connector for RG 213 coaxial cables.



Specifications:

Temperature range:	-40 to +85 [°C]
Insulation resistance:	≥ 5000 [MΩ]
Frequency range DC:	≈ 300 [MHz]
Impedance:	50 [Ω]
Voltage:	750 [V max]
Testvoltage:	2000 [V max]
Durability:	≥ 500 [Cycles]

Prod.no: 65452

Construction:

Center contact:	Brass bar (Cu/Ep Ni)
Body:	Brass bar (Cu/Ep Ni)
Socket:	Beryllium (Cu/Ep Au)
Insulator:	PTFE
Crimping suite:	Copper alloy (Cu/Ep Ni)

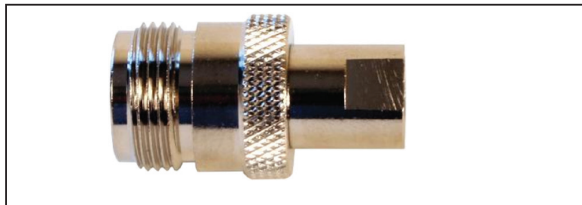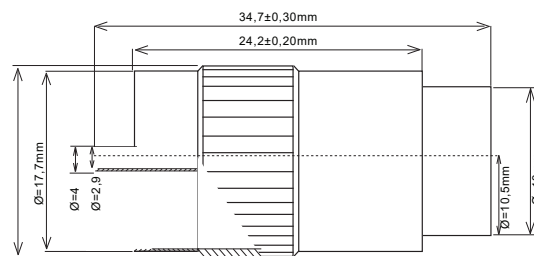

N-Female for RG 213

N-C-K213
IP67
50Ω

Application:

Straight N Female connector for RG 213 coaxial cables. Waterproof acc. to. IP67.

Specifications:

Temperature range:	-40 to +125 [°C]
Insulation resistance:	≥ 5000 [MΩ]
Frequency range DC:	≈ 3 [GHz]
Impedance:	50 [Ω]
VSWR:	≤ 1,15
Voltage:	1000 [V max]
Testvoltage:	1500 [V max]
Durability:	≥ 500 [Cycles]


Norms:

Salt spray test:	Neutral salt spray 48H
Waterproof:	IP67


Prod.no: 65456

Construction:

Body:	Brass bar (Cu/Ep Ni)
Socket:	Bronze line (Cu/Ep Au)
Insulation:	PTFE
Outer conductor:	Brass bar (Cu/Ep Ni)
Crimping sleeve:	Red copper (Cu/Ep Ni)

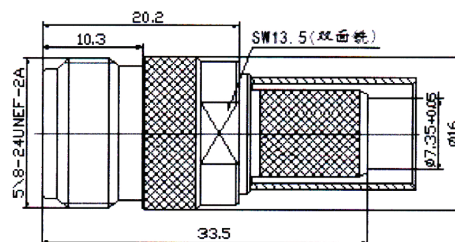

N-Male for RG 214

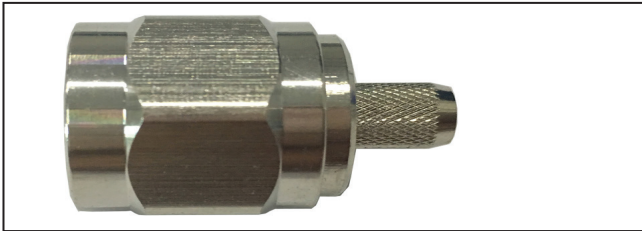

Application:

Straight N Male connector for RG 214 coaxial cables. Waterproof acc. to. IP67.

Specifications:

Temperature installed:	-40 to +125 [°C]
Working voltage:	max. 1000 [V]
Withstand voltage:	max. 2500 [V]
Frequency range DC:	6 [GHz]
Impedance:	50 [Ω]
Insulation recitance:	≥5000 [MΩ]
Voltage Standing Wave Ratio:	≤1,20
Waterproof acc. to:	IP67

Prod.no: 65450

N-Male for RG 214


N-C-J214

IP67


50 Ω

Construction:

<i>Body:</i>	Brass bar
<i>Sender pin:</i>	Brass bar
<i>Insulation:</i>	PFA/PTFE
<i>Thread sleeve:</i>	Brass bar
<i>Snap ring:</i>	Bronze wire
<i>O-ring:</i>	Siliastic

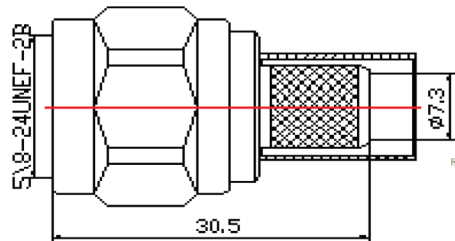

UHF for RG 214

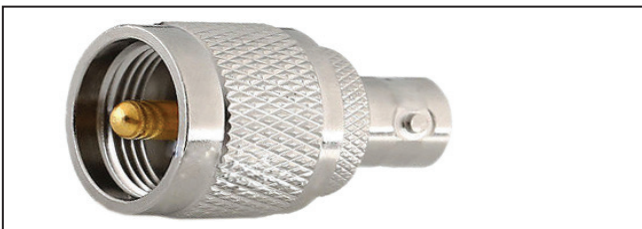

Application:

UHF-connector for RG 214 coaxial cables. Waterproof acc. to. IP67.

Specifications:

Temperature installed:	-40 to +85 [°C]
Working voltage:	max. 1000 [V]
Withstand voltage:	max. 3500 [V]
Frequency range DC:	2 [GHz]
Impedance:	50±5 [Ω]
Insulation recitance:	≥5000 [MΩ]
Voltage Standing Wave Ratio:	≤1,30
Waterproof acc. to:	IP67

Prod.no: 65451

UHF-connector for RG 214


UHF-C-J214

IP67

50 Ω

Construction:

<i>Body:</i>	Brass bar
<i>Sender pin:</i>	Brass bar
<i>Insulation:</i>	PFA/PTFE
<i>Connecting sleeve:</i>	Brass bar
<i>Snap ring:</i>	Bronze wire

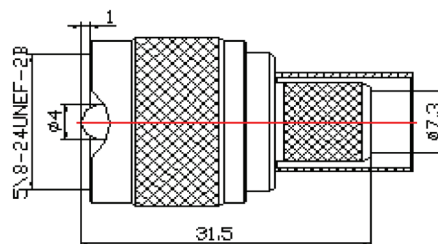



N-Male for RF 400 Ultraflex



N-Male - Marine for RF 400 Ultraflex DNV IP67

Application:

Clamp Male-connector for marine application. Waterproof acc. to. IP 67
Fitting the RF 400 Ultraflex, can be used with our DNV-certified cable.
Also suitable for ECOFLEX 10

Specifications:

Electrical


Impedance:	50 [Ω]
Temperature range	- 40 til +125 [$^{\circ}$ C]
Insulation resistance:	\geq 5 [$G\Omega$]
VSWR:	\leq 1,08 [28dB] up to 2,5GHz
Working voltage:	1400 [V]
Maxload:	2500 [V]

Mecanical

Coupling nut proof torque:	\leq 1,7 [nM]
Recommended coupling nut torque:	0,7 to 1,1 [nM]
Coupling nut retention:	\geq 450 [N]
Mating cycles:	\geq 500
Operating temperature:	-40 - +85 [$^{\circ}$ C]


Construction:

Body:	Brass-ternary alloy plated
Center contact:	Brass-gold plated
Insulator	PTFE
Outer metal parts:	Brass-ternary alloy plated
Gasket:	Silicone rubber

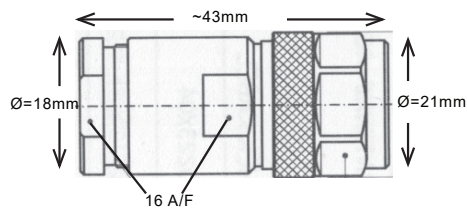

Product no: 65456

N-Male and Female for RF LLF 1/2"

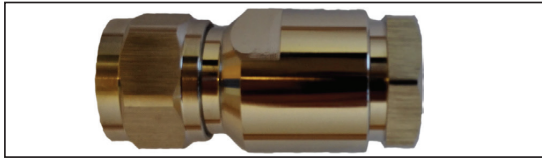

N-Male - Marine for RF LLF 1/2" -DNV IP67 N-J1/2 - 24M

Application:

Clamp Male-connector for marine application. Waterproof acc. to. IP 67
Fitting the RF LLF 1/2" 50 -marine, can be used with our DNV-certified cable.



Specifications:

Impedance:	50 [Ω]
Temperature range	- 40 til +125 [°C]
Frequency:	DC ≈ 3 [GHz]
Insulationrecistance:	≥ 5000 [MΩ]
VSWR:	≤ 1,1 [@ 3GHz]
Voltage max.:	1000 [V]
Maxload:	2500 [V]
Dielectric withsanding voltage:	2000 [V]
Durability:	≥ 500 [cycles]

Product no: 65402

Construction:

1. Brass-shell (Cu/Ep.CuSnZn)
2. Center conductor, brass bar (Cu/Ep.Ag)
3. Insulator, PTFE
4. Bushing, brass bar (Cu/Ep.Ag)
5. Nut thread, brass bar (Cu/Ep.CuSnZn)
6. Connecting sleeve, brass bar (Cu/Ep.CuSnZn)
7. Snap ring, bronze wire
8. Waterproof O-ring (silastic 6141)

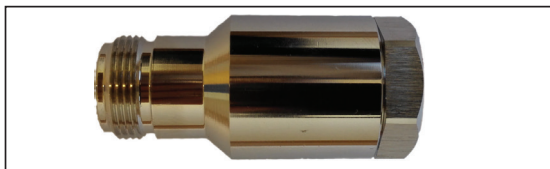

N-Female for RF LLF 1/2" Hiflex IP67 N-K1\2


Application:

Clamp Male-connector for outdoor use. Waterproof acc. to. IP 67
Fitting the RF LLF 1/2" 50 Hiflex- cables.

Specifications:

Impedance:	50 [Ω]
Temperature range:	- 40 til +125 [°C]
Frequency:	DC opp til 3 [GHz]
Insulationrecistance:	≥ 5000 [MΩ]
VSWR:	≤ 1,25
Voltage max.:	1000 [V]
Maxload:	2500 [V]
IM3:	≤ 160 [dBc]
Durability:	≥ 500 [cycles]
Waterproof acc. to:	IP67


Dimensions by stripping the cable:



Product no: 65436

Construction:


1. Brass-shell (Cu/Ep.CuSnZn)
2. Contact bronze wire (Cu/Ep.Ag)
3. Insulator PTFE
4. Insulator PTFE
5. Lining of brass (Cu/Ep.Ag)
6. Threaded sleeve of brass (Cu/Ep.CuSnZn)
7. Waterproof O-ring (silastic 6141)
8. Waterproof O-ring (silastic 6141)

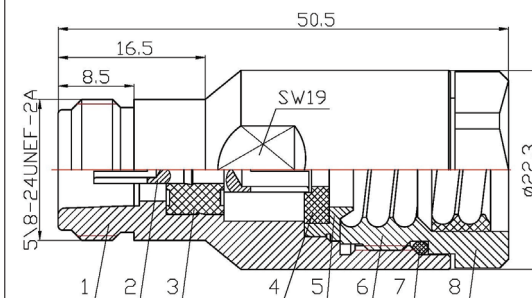

Values in mm



N-Male and Female for RF LLF 7/8"

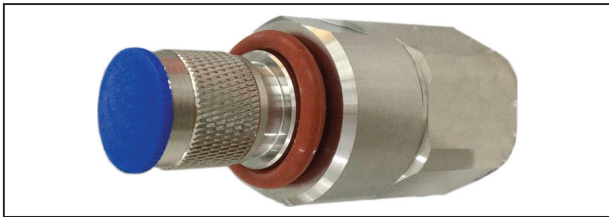

N-Male for RF LLF 7/8"

N-J7/8

IP67

50Ω

Application:



Straight N Male connector for 7/8" LowLoss feeder cables. Connector acc. IP67. (Can reach IP68 when the other end is connected to the cable with shrinkable external tube).

Specifications:

Temperature range:	-40 to +85 [°C]
Insulation resistance:	≥ 5000 [MΩ]
Frequency range DC:	≈ 3 [GHz]
Impedance:	50 [Ω]
VSWR 0.3 - 2.5:	≤1.12
VSWR 2.5 - 3:	≤1.15
Intermodulation (2x20W):	≥150 [dBc]
Prod.no:	65437

Construction:

Center contact:	Bronze
Outer contact:	Brass
Body:	Brass
Insulation:	PFA/PTFE
Coupling nut:	Brass

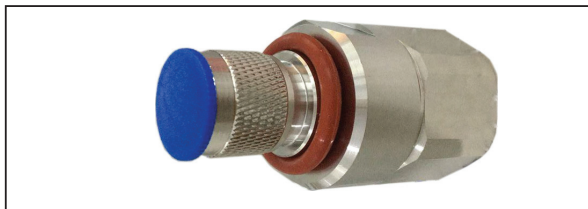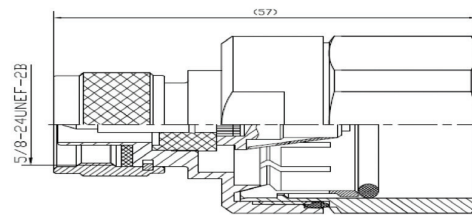

N-Male for RF LLF 7/8" Hiflex

N-K7/8S

IP67

50Ω

Application:

Straight N Male connector for flexible 7/8" LowLoss feeder cables. Connector acc. IP67. (Can reach IP68 when the other end is connected to the cable with shrinkable external tube).

Specifications:

Temperature range:	-40 to +85 [°C]
Insulation resistance:	≥ 5000 [MΩ]
Frequency range DC:	≈ 3 [GHz]
Impedance:	50 [Ω]
VSWR 0.3 - 2.5:	≤1.12
VSWR 2.5 - 3:	≤1.15
Intermodulation (2x20W):	≥150 [dBc]
Prod.no:	65439

Construction:

Center contact:	Bronze
Outer contact:	Brass
Body:	Brass
Insulation:	PFA/PTFE
Coupling nut:	Brass

RG 59 B/U Marine Flex

75 Ω Flexible

SHF1

DNV-GL


Application

Type RG 59 for ship- and offshore applications. Communication and video signals. Stranded conductor is used for better protection against vibrations and cold bend.



Construction

Conductor	Stranded Plain Cu 7 x 0,20 [mm]
Dielectricum	Low density PE 3.7 \pm 0.10 [mm]
Screen	Al-polyester-Al tape 100 [% optical coverage]
Screen	Cu-braid 91 [% optical coverage]
Jacket	Black SHF1
O.D.	6.20 \pm 0.20 [mm]
Weight	51.4 [kg/km]
Jacket marking	NEK Kabel RG 59 B/U Marine Flex, DD.MM.YY batch number and meter ma



Specifications

Operating temperature	-40 – +70 [$^{\circ}$ C]
Characteristic impedance	75 \pm 3 [Ω]
Braid Resistance	10 [Ω /km]
Conductor resistance	82 [Ω /km]
Test voltage	5 [kV]
Capacitance	67 [pF/m]
Velocity factor	0,66
Min. bending radius	5 [x outer diam]
Min. bending radius flexible	10 [x outer diam]
Part No.	1092218



Norms and tables for RG 59 BU Marine Flex

Norms

Halogenfree, max content corrosive and toxic gases	IEC 60754-2
Design and testing standards	IEC 60096-0-1 Ed 3
Sheathing material	IEC 60092-360 (359)
Flame retardant	IEC 60332-1
Toxic gases max.	IEC 60092-359
Fire retardant	IEC 60332-3-22 Cat.A
Smoke emission	IEC 61034-1, -2
Certification	DNV-GL

Attenuation

Frequency (MHz)	Attenuation Max. (dB/100m)
50	7,0
100	10,1
200	14,0
400	20,2
800	30,3
1000	34,8

Structural return loss dB

MHz	dB
30 - 300	> 30
300 - 600	> 25
600 - 1000	> 22
1000 - 2000	> 20
2000 - 3000	> 16

Screening effectiveness IEC 61196-1

MHz	dB
100 – 900	>90
900 – 2000	>80
2000 – 3000	>70

RG 59 Marine Flex ARM

75Ω Flexible
Steel wire armour
SHF1
DNV-GL


Application

RG 59 type, with flexible conductor for ship- and offshore communication and video signals. Stranded conductor protecting against vibrations.



Construction

Conductor	Flexible Plain Cu 7 x 0,25 [mm]
Dielectricum	Low density PE 3.7 [mm]
Screen	Al-polyester-Al tape
Screen	Cu-braid 92 [% optical coverage]
Inner jacket	SHF1 6.2 ± 0.2 [mm]
Armour alt.1	Galvanised steel wire braid
Armour alt.2	Tinned Cu-braid
Armour alt.3	Bronze wire braid
Jacket	Black SHF1
O.D.	9.4 ± 0.2 [mm]
Weight	136 [kg/km]
Jacket marking	NEK Kabel-RG59 Flex Marine SHF1 Armoured DNV-IEC60332-3-24



Specifications

Operating temperature	-40 – +75 [°C]
Characteristic impedance	75 ± 3 [Ω]
Braid Resistance	10 [Ω/km]
Conductor resistance	82 [Ω/km]
Test voltage	5 [kV]
Capacitance	67 [pF/m]
Velocity factor	66%
Min. bending radius	5 [x outer diam]
Min. bending radius flexible	10 [x outer diam]
Part No.	1092226 (GSWB)



Norms and tables for RG 59 BU Marine Flex ARM

Norms

Halogenfree, max content corrosive and toxic gases	IEC 60754-2
Sheathing material	IEC 60092-360 (359)
Flame retardant	IEC 60332-1
Fire retardant	IEC 60332-3-22 Cat.A
Smoke emission	IEC 61034-1, -2
Certification	DNV-GL

Attenuation

Frequency (MHz)	Attenuation Max. (dB/100m)
50	7,0
100	10,1
200	14,0
400	20,2
800	30,3
1000	34,8

Structural return loss dB

MHz	dB
30 – 300	>30
300 – 600	>25
600 – 1000	>22
1000 – 2000	>20
2000 – 3000	>16

Screening effectiveness IEC 61196-1

MHz	dB
100 – 900	>90
900 – 2000	>80
2000 – 3000	>70

RG 6 A/U Marine

75Ω

Super-screened,

SHF1

DNV-GL, ABS


Application

Robust long life coaxial cable designed for ship- and offshore environments. Electrical data in compliance with MIL C-17. The Aluminum tape, together with one copper braided screen and one silver coated copper braided screen, provides super-screening effectiveness. RG 6 A/U Marine cannot be replaced by any other Type RG 6 products.



Construction

Conductor	Copperweld 0.72 ± 0.025 [mm]
Dielectricum	PE 4.70 ± 0.10 [mm]
Screen	Al-polyester-Al tape 100 [% optical coverage]
Screen	Silvercoated Cu braid 96 [% optical coverage]
Screen 2	Cu- braid 96 [% optical coverage]
Jacket	Black SHF1
O.D.	8.5 ± 0.1 [mm]
Weight	115 [kg/km]
Jacket marking	NEK Kabel - mm/yyyy - RG 6 AU Marine SHF1 - DNV approval no - lot no- m



Specifications

Operating temperature	-40 – 70 [°C]
Characteristic impedance	75 ± 3 [Ω]
Braid Resistance	5 [Ω/km]
Conductor resistance	<97 [Ω/km]
Test voltage	6 [kV]
Capacitance	67 [pF/m]
Min. bending radius	5 [x outer diam]
Min. bending radius flexible	10 [x outer diam]

Norms

Halogenfree, max content corrosive and toxic gases	IEC 60754-1, -2
Design and testing standards	IEC 60096-0-1 Ed 3 IEC 60092-350 IEC 60096 - 4
Sheathing material	IEC 60092-360 (359)
Flame retardant	IEC 60332-1
Fire retardant	IEC 60332-3-22 Cat.A
Smoke emission	IEC 61034-1, -2
Certification	DNV-GL, ABS



Tables for RG 6 A/U Marine

Part No. 1092448

Use BNC crimp LSD 53938C.
Can not be used with standard F-connectors.

Frequency (MHz)	Attenuation Max. (dB/100m)
5	1,8
10	2,3
50	5,7
100	8,1
200	11,7
300	14,5
500	19,0
600	21,0
800	24,6
1000	27,7
1350	32,6
1500	34,6
1750	38,7
2150	44,1
2250	44,5
2500	46,6
2750	49,3
3000	53,4

Structural return loss dB

MHz	dB
30 - 300	> 28
300 - 600	> 24
600 - 1000	> 22
1000 - 2000	> 18
2000 - 3000	> 15

Screening effectiveness IEC 61196-1

MHz	dB
100 - 900	> 90
900 - 2000	> 80
2000 - 3000	> 70

RG 6 A/U Marine MUD

75Ω

Super-screened

SHF2, MUD resistant sheath

DNV-GL


Application

Robust long life coaxial cable designed for ship- and offshore environments. Electrical data in compliance with MIL C-17. The aluminum tape, together with one copper braided screen and one silver coated copper braided screen, provides super-screening effectiveness. RG 6 A/U Marine cannot be replaced by other Type RG 6 products.



Construction

Conductor	Copperweld 0.720 ± 0.025 [mm]
Dielectricum	PE 4.7 ± 0.1 [mm]
Screen	Al-polyester-Al tape 100 [% optical coverage]
Screen	Silvercoated Cu braid 96 [% optical coverage]
Screen 2	Cu- braid 96% [% optical coverage]
Jacket	Black SHF2
O.D.	10.5 [mm]
Weight	135 [kg/km]
Jacket marking	NEK Kabel , date, type, DNV approval



Specifications

Operating temperature	-40 – +70 [°C]
Characteristic impedance	75 ± 3 [Ω]
Braid Resistance	5 [Ω/km]
Conductor resistance	<97 [Ω/km]
Insulation resistance	>10 [GΩ x km]
Test voltage	6 [kV]
Capacitance	67 [pF/m]
Velocity factor	0,66
Min. bending radius	5 [x outer diam]
Min. bending radius flexible	10 [x outer diam]

**Norms and tables for RG 6 AU Marine ARM****Norms**

Halogenfree, max content corrosive and toxic gases	IEC 60754-1, -2
Design and testing standards	IEC 60096-0-1 Ed 3 IEC 60096 - 4
Sheathing material	IEC 60092-360 (359)
Flame retardant	IEC 60332-1
Fire retardant	IEC 60332-3-24 Cat.C
Smoke emission	IEC 61034-2
MUD resistant	NEK TS 606 F5
Certification	DNV-GL
Part No.	1092450

Frequency MHz	Attenuation dB/100m
5	1.8
10	2.3
50	5.7
100	8.1
300	14.5
500	19.0
800	24.6
1000	27.7
1500	34.6
1750	38.7
2500	46.6
3000	53.4

Structural return loss

MHz	dB
30 – 300	>28
300 – 600	>24
600 – 1000	>22
1000 – 2000	>18
2000 – 3000	>15

Screen effectiveness IEC 61196-1

MHz	dB
100 – 900	>90
900 – 2000	>80
2000 – 3000	>70

RG 11 A/U Marine

75 Ω

SHF1

DNV-GL, ABS


Application

Coaxial cable designed for ship- and offshore applications. Data and video signals transmission. Electrical data in compliance with MIL C-17F.



Construction

Conductor	Stranded Tinned Cu 7 x 0.40 [mm]
Dielectricum	Low density PE 7.25 \pm 0.18 [mm]
Screen	Al + polyester + Al tape 100 [% optical coverage]
Screen 2	Cu- braid 96 [% optical coverage]
Jacket	Black SHF1
O.D.	10.3 \pm 0.18 [mm]
Weight	150 [kg/km]



Specifications

Operating temperature	-40 – 70 [°C]
Characteristic impedance	75 \pm 3 Ω
Braid Resistance	4.4 [Ω /km]
Test Voltage	5.5 [kV]
Conductor resistance	20.5 [Ω /km]
Capacitance	67 [pF/km]
Velocity factor	0.67
Min. bending radius	5 [x outer diam]
Min. bending radius flexible	10 [x outer diam]

Norms

Halogenfree, max content corrosive and toxic gases	IEC 60754-1, -2
Design and testing standards	IEC 60096-0-1 Ed 3
Sheathing material	IEC 60092-360 (359)
Flame retardant	IEC 60332-1
Fire retardant	IEC 60332-3-22 Cat.A
Smoke emission	IEC 61034-2
Certification	DNV-GL, ABS



Norms and tables for RG 11 AU Marine

Part No. 1092456



Alternative designs, armoured, MUD resistant, in any combination.

Attenuation nominal, max 105%

Frequency MHz	Attenuation dB/100m
5	1.1
10	1.3
50	4.2
100	6.1
300	11.8
500	16
800	21.4
1000	24.3
1500	31
1750	36
2150	40.2
2500	42.4
3000	49

Structural return loss

MHz	dB
30 – 300	>30
300 – 600	>27
600 – 1000	>25
1000 – 2000	>22
2000 – 3000	>20

Screen effectiveness IEC 61196-1

MHz	dB
100 – 900	>90
900 – 2000	>80
2000 – 3000	>70

RG 11 A/U Marine MUD

75Ω
SHF2
DNV-GL


Application

Coaxial cable designed for use in harsh environments like ship- and offshore applications. Data and video transmission. Electrical data in compliance with MIL C-17F.



Construction

Conductor	Stranded Tinned Cu 7 x 0.40 [mm]
Dielectricum	Low density PE 7.25 ± 0.18 [mm]
Screen	Al + polyester + Al tape 100 [% optical coverage]
Screen 2	Cu- braid 96 [% optical coverage]
Jacket	Black SHF2
O.D.	12.80 ± 0.18 [mm]
Weight	165 [kg/km]
Jacket marking	NEK Kabel date-RG11AU Marine SHF2 DNV m



Specifications

Operating temperature	-40 – 70 [°C]
Characteristic impedance	75 ± 3 Ω
Braid Resistance	4.4 [Ω/km]
Conductor resistance	20.5 [Ω/km]
Capacitance	67 [pF/m]
Velocity factor	0.67
Min. bending radius	5 [x outer diam]
Min. bending radius flexible	10 [x outer diam]

Norms

Halogenfree, max content corrosive and toxic gases	IEC 60754-1, -2
Design and testing standards	IEC 60096-0-1 Ed 3
Sheathing material	IEC 60092-360 (359)
Flame retardant	IEC 60332-1
Fire retardant	IEC 60332-3-24 Cat.C
Smoke emission	IEC 61034-2
MUD resistant	NEK TS 606 F5
Certification	DNV-GL

Part No.	1092458
----------	---------



Norms and tables for RG 11 AU Marine MUD



RG 11 A/U is also available in armoured design (equals RG 12)

Attenuation nominal, max 105%

Frequency MHz	Attenuation dB/100m
5	1.1
10	1.3
50	4.2
100	6.1
300	11.8
500	16.0
800	21.4
1000	24.3
1500	31.0
1750	36.0
2150	40.2
2500	42.4
3000	49.0

Structural return loss

MHz	dB
30 – 300	>30
300 – 600	>27
600 – 1000	>25
1000 – 2000	>22
2000 – 3000	>20

Screen effectiveness IEC 61196-1

MHz	dB
100 – 900	>90
900 – 2000	>80
2000 – 3000	>70

RG 11 A/U Marine ARM

75Ω, PE solid

Al tape + Cu braided screen

+ armour steel wire braid, Equal to RG 12

SHF1

DNV-GL, ABS


Application

Coaxial cable for data- and video use, suitable for installation on board of ship and other marine environments. Electrical data in compliance with MIL C-17/F. Steel wire braid armour meets requirements of EMC directive. The cable design equals RG 12, but with slightly improved electrical data.



Construction

Conductor	Stranded Tinned Cu 7 x 0,40 [mm]
Dielectricum	PE 7,25 ± 0,18 [mm]
Screen	Al + polyester + Al tape 100 [% optical coverage]
Screen 2	Cu- braid 96 [% optical coverage] 192 x 0,18 [mm]
Inner jacket	SHF1
Armour alt.1	Galvanised steel wire braid
Armour alt.2	Tinned Cu-braid
Armour alt.3	Bronze wire braid
Jacket	Black or grey SHF1
O.D.	13.50 ± 0.20 [mm]
Weight	277 [kg/km]
Jacket marking	RG 11 AU Marine SHF1 Armoured DNV IEC 60332-3-22



Specifications

Operating temperature	-40 – 70 [°C]
Braid Resistance	4.4 [Ω/km]
Conductor resistance	22.5 [Ω/km]
Test voltage	5.5 [kV]
Capacitance	67 [pF/m]
Min. bending radius	5 [x outer diam]
Min. bending radius flexible	10 [x outer diam]
Part No.	1092457-Black, 1092499-Grey



Norms and tables for RG 11 AU Marine ARM

Norms

Halogenfree, max content corrosive and toxic gases	IEC 60754-1, -2
Design and testing standards	IEC 60096-0-1 Ed 3
Sheathing material	IEC 60092-360 (359)
Flame retardant	IEC 60332-1
Fire retardant	IEC 60332-3-22 Cat.A
Smoke emission	IEC 61034-1, -2
Certification	DNV-GL, ABS



Suitable connector: F-J11 RG 11 ARM, prod.no: 65458
 Alternative product with MUD resistant jacket, part number 1092459

Attenuation

Frequency (MHz)	Attenuation Max. (dB/100m)
5	1,1
10	1,3
50	4,2
100	6,1
200	9,2
300	11,8
500	16,0
600	17,9
800	21,4
1000	24,3
1350	29,1
1500	31,0
1750	35,0
2150	40,2
2250	40,5
2500	42,4
2750	45,0
3000	49,0

RG 11 A/U Marine ARM MUD

75Ω Equal to RG 12

SHF2


Application

Coaxial cable for data- and video use, designed for installation on board of ship and other marine environments. Steel wire braid armour meets requirements of EMC directive. Electrical data in compliance with MIL C-17/F. The design equals RG 12, with slightly better electrical data.



Construction

Conductor	Stranded 7 x 0,40 [mm]
Dielectricum	LDPE 7.25 ± 0.18 [mm]
Screen	Al + polyester + Al tape 100 [% optical coverage]
Screen 2	Cu- braid 96 [% optical coverage] 192 x 0,18 [mm]
Inner jacket	SHF1 10.30 ± 0.18 [mm]
Armour alt.1	Galvanised steel wire braid
Armour alt.2	Tinned Cu-braid
Armour alt.3	Bronze wire braid
Jacket	Black SHF2
O.D.	17.00 ± 0.18 [mm]
Weight	352 [kg/km]
Jacket marking	NEK Kabel Date RG11AU Marine SHF2 Armoured



Specifications

Operating temperature	-40 – 70 [°C]
Braid Resistance	4.4 [Ω/km]
Conductor resistance	20.5 [Ω/km]
Capacitance	67 [pF/m]
Min. bending radius	15 [x outer diam]

Norms

Halogenfree, max content corrosive and toxic gases	IEC 60754-1, -2
Design and testing standards	IEC 60096-0-1 Ed 3
Sheathing material	IEC 60092-360 (359)
Flame retardant	IEC 60332-1
Fire retardant	IEC 60332-3-24 Cat.C
Part No.	1092459



Norms and tables for RG 11 AU Marine ARM MUD

Attenuation

Frequency (MHz)	Attenuation Max. (dB/100m)
5	1,1
10	1,3
50	4,2
100	6,1
200	9,2
300	11,8
500	16,0
600	17,9
800	21,4
1000	24,3
1350	29,1
1500	31,0
1750	35,0
2150	40,2
2250	40,5
2500	42,4
2750	45,0
3000	49,0

Structural return loss dB

MHz	dB
30 - 300	> 30
300 - 600	> 27
600 - 1000	> 25
1000 - 2000	> 22
2000 - 3000	> 20

SAT 22 ITV

RG 59 B/U + 2 x 0.75mm²

LSZH and UV resistant

75 Ω

Application

Composite ITV cable for camera signal and control transmission. SAT 22 is designed for use in ship and offshore or other applications where strict norms for fire safety is required. It is a compact and tight jacketed cable, for easy handling and installation.




RG 59 B/U

Conductor	Copperweld 0.58 [mm]
Dielectric	PE Ø=3,7 [mm]
Screen	Cu-braid > 90% [% optical cover]
Jacket	Black LSZH compound

Multi cable

O.D.	10 [mm]
Conductor	Stranded Cu 2 x 0.75 [mm ²]
Insulation	PE
Color	Red and black
Overall jacket	Black LSZH compound



Specifications

Operating temperature	-30 - +80 [°C]
Temperature @ installation	0 - +50 [°C]

Specifications Coax Cable

DC-resistance centre conductor	155 Ω/km
DC-resistance screen	10,1 Ω/km
Impedance	75 [Ω]



Norms and tables for SAT 22 ITV

Multi cable

Multi cable	2 x 0.75 [mm ²]
Rated voltage	250 [V-max]
Test voltage	1200 [V]
Loop resistance	26 [Ω/km]

Norms

Halogenfree, max content corrosive and toxic gases	IEC 60754
Flame retardant	IEC 60332-1
Smoke emission	IEC 61034

Part No.	1092421
----------	---------

Attenuation nominal, max 105%

Frequency MHz	Attenuation dB/100m
10	3,6
50	7,7
100	11,0
200	13,9
400	23,1
800	34,2
1000	38,9

SAT 21 ITV

RG 59 B/U + 2 x 1.5mm²

LSZH and UV resistant

75Ω

Application

Composite ITV cable for camera signal and control transmission. SAT 21 is designed for use in ship and offshore applications, but is also used where strict norms for fire and safety is required. It is a compact and tight jacketed cable, for easy handling and installation.




RG 59 B/U

Conductor	Copperweld 0,58 [mm]
Dielectric	PE Ø=3,7 [mm]
Screen	> 90 [% optical cover]
Jacket	Black LSZH compound

Multi cable

Multicore	2x1.5 [mm ²]
Conductor	1.5 [mm ²]
Insulation	LSZH Compound
Color	Red and black
Overall jacket	Black LSZH-compound
Outer diam.	10,5 [mm]



Specifications

Operating temperature	-30 – +80 [°C]
Temperature @ installation	0 – +40 [°C]

Specifications Coax Cable

DC-resistance centre conductor	155 Ω/km
DC-resistance screen	10,1 Ω/km
Impedance	75 [Ω]
Capacitance @ 800Hz	67 pF/m
Attenuation	see table
Velocity factor	0,66



Norms and tables for SAT 22 ITV


Multi cable

Multi cable	2 x 1.5 [mm ²]
Rated voltage	250 [V-max]
Test voltage	500 [V]
Loop resistance	≥ 14 [Ω/km]
Part No.	1092409

Attenuation nominal, max 105%

Frequency MHz	Attenuation dB/100m
10	3.6
50	7.7
100	11.0
200	15.9
400	23.1
800	34.2
1000	38.9

N-Male connector for RG 59

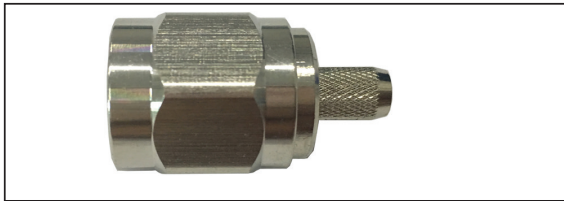

N-Male for RG 59

N-C-75J59

IP67

75Ω

Application:

Straight N Male connector for RG 59 coaxial cables. Waterproof acc. to IP67

Specifications:


Temperature range:	-40 to +125 [°C]
Insulation resistance:	≥ 5000 [MΩ]
Frequency range DC:	≈ 2,5 [GHz]
Impedance:	75 [Ω]
VSWR at 2,5GHz:	≤ 1,15
Voltage:	1000 [V max]
Test voltage:	1500 [V max]
Durability:	≥ 500 [Cycles]
Waterproof acc. to:	IP67

Norms:

Salt spray test:	Neutral salt spray 96H
Waterproof:	IP 67

Construction:

Center contact:	Brass bar (Cu/Ep Ag)
Body:	Brass bar (Cu/Ep Cu Sn Zn)
Insulation:	PFA/PTFE
Connectingsleeve:	Brass bar (Cu/Ep Cu Sn Zn)
Snap ring:	Bronze wire
O-ring:	Silastic
Crimping sleeve:	Red copper (Cu/Ep Ni)
Heat shrinkable tube:	Black PE

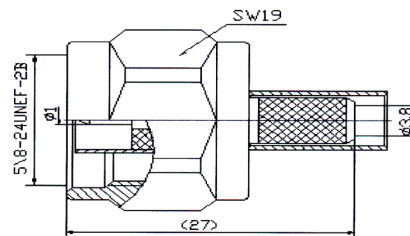

Prod.no: 65453

RoHS ✓

F-connector for RG 11



F-Connector for RG 11ARM

IP67

75 Ω

Bruksområde:


F connector for RG 11 coaxial cables. Waterproof acc.to IP67.

Specifications:

Temperature range:	-40 to +60 [°C]
Insulation resistance:	≥ 1000 [MΩ]
Frequency range DC:	≈ 1 [GHz]
Impedance:	75 [Ω]
Withstand voltage:	V00 [V max]
Durability:	≥ 500 [Cycles]
Waterproof acc.to:	IP67

Construction:

Center contact:	Brass bar (Cu/Ep Ni)
Body:	Brass bar (Cu/Ep Ni)
Nut:	Brass bar (Cu/Ep Ni)
Spring:	Phosphor bronze (CuP/Ep Ni)
Rivet:	Brass bar (CuP/Ep Ni)

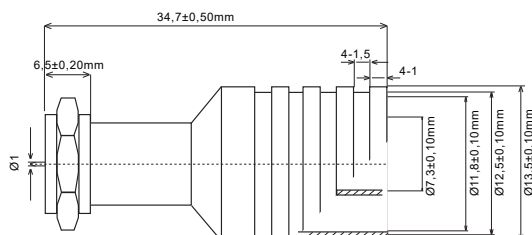

Prod.no: 65458

RoHS ✓



CAN Bus Marin 1 pair

SHF2
Flexible
0,75 mm²
DNV-GL, ABS


Application

Designed for CAN bus systems. For use in ship- and offshore environments.



Construction

Conductor	Flexible Plain Cu 0.75mm ² (24 x 0.20 mm)
Protective conductor	Stranded tinned Cu 0.75 [mm ²] Insulation polyolefin Y/G
Insulation	Foamskin PE 2,95 [mm]
No. of pairs	1
Individual Screen pairs	Al-/polyester tape 100% [coverage]
Screen	Tinned Cu-braid 80 [% optical coverage]
Fire resistant barrier	Fire barriere tape
Jacket	Black or purple SHF2
Outer diam	11.5 [mm]
Weight	180 [kg/km]
Jacket marking	NEK CANBUS MARIN1 x 2 x 0.75 mm ² SHF2 DNV-GL M Y m-marking



Specifications

Operating temperature	-40 – +90 [°C]
Characteristic Impedance @ 1MHz	120 [Ω]
Operating voltage	100 [V]
Conductor resistance	<26 [Ω/km]
Insulation resistance	≥ 1 [GΩ x km]
Test voltage	1500 [V-AC]
Capacitance	40 [pF/m] at 800 - 1000 Hz
Attenuation	@1 MHz: 13.2 dB/km
Min. bending radius flexible	20 [x outer diam]
Min. bending radius installed	10 [x outer diam]

Norms and tables for CAN Bus Marin 1 pair

Norms

Halogenfree, max content corrosive and toxic gases	IEC 60754-1, -2 NES 713
Design and testing standards	IEC 61156-5
Sheathing material	IEC 60092-360 (359)
Flame retardant	IEC 60332-1-2
Fire retardant	IEC 60332-3-22 Cat.A
Ozone resistant	DIN VDE 0472 part 805B
Smoke emission	IEC 61034-1, -2
Field bus specifications	IEC 61158-2 ed. 1
Certification	DNV-GL, ABS

Part No.	1 pair black: 1087380 1 pair purple 1091044
----------	---



Also available 2pairs: Part no. 2 pair black: 1087381 and purple: 1091046

Also available with MUD resistant jacket, acc. to NEK TS 606,

One pair: Part no. 1087382

Two pairs: Part no. 1087383



CAN Bus Marin 2 pairs

SHF2**Flexible****0.75 mm²****DNV-GL, ABS**


Application

Network bus cable, designed for CAN bus systems. For use in ship- and offshore environments to connect control devices to main computer.



Construction

Conductor	Flexible Plain Cu 0.75mm ² (24 x 0.20 mm)
Insulation	Foamskin PE 2.4 [mm]
No. of pairs	2
Colour code	1. green-blue, 2. red-brown
Screen	LSZH thermoplastic compound
Screen	Al-polyester-Al-tape
Screen 2	Tinned Cu braid 85 [% optical coverage]
Fire resistant barrier	Flame barriere tape
Jacket	Black or purple SHF2
Outer diam	10.5 [mm]
Weight	170 [kg/km]
Jacket marking	NEK CANBUS MARIN 2 x 2 x 0.75 mm ² SHF2 M/Y, metric marking



Specifications

Operating temperature	-40 – +90 [°C]
Capacitance betw. conductors	1 MHz: 13.2 dB/km (pF/100m)
Caracteristic Impedance @ 1MHz	120 ± 18 [Ω]
Operating voltage	100 [V]
Test Voltage	1.5 [kV AC]
Conductor resistance	<26 [Ω/km]
Insulation resistance	1 [GΩ x km]
Test voltage	1.5 [kV-AC]
Capacitance	40 [pF/m]
Min. bending radius flexible	20 [x outer diam]
Min. bending radius installed	10 [x outer diam]

Norms and tables for CAN Bus Marin 2 pairs

Norms

Halogenfree, max content corrosive and toxic gases	IEC 60754-1, -2 EN 50305 9.2
Design and testing standards	IEC 61156-5
Sheathing material	IEC 60092-360 (359)
Flame retardant	IEC 60332-1
Fire retardant	IEC 60332-3-22 Cat.A
Ozone resistant	DIN VDE 0472 part 805B
Smoke emission	IEC 61034-1, -2
Field bus specifications	IEC 61158-2 ed. 1
Certification	DNV-GL, ABS

Part No.	2 pairs black: 1087381 2 pairs purple: 1091044
----------	--



Canbus Marin is available with MUD resistant jacket.
Part no. 1 pair: 1087382, 2 pairs: 1087383



Profibus DP Marin

LSZH SHF2**Flexible Type A, 2x0,35 mm²****UV****DNV-GL, ABS**


Application

Profibus data cable for communication systems and closed loop marine control systems.



Construction

Conductor	Stranded Plain Cu AWG22 (0.35mm ²)
Insulation	Foamskin PE 2.75 [mm]
No. of pairs	1
Screen	Al-polyester-Al tape
Screen 2	Tinned Cu braid 60 [% optical coverage]
Jacket	Black SHF2
Outer diam	8.6 [mm]
Weight	95 [kg/km]
Jacket marking	NEK KABEL - PROFIBUS DP MARIN 1X0,35mm ² SHF2- 100V-LSOH, DNV-GL, ABS



Specifications

Operating temperature	-40 – +90 [°C]
Loop resistance screen-conductor	0.11 [Ω/m]
Loop Resistance / Inductance Ratio	<15 (nom. 8.5) [μH/Ω]
Inductance	0.9 [μH/m]
Characteristic impedance	3 - 20 MHz
Conductor resistance	<55 [Ω/km]
Insulation resistance	≥ 1 [GΩ x km]
Test voltage	1000 [kV-DC 1 min.]
Capacitance	<30 (nom. 28) [pF/m] at 800 - 1000 Hz
Min. bending radius	20 [x outer diam]

Norms and tables for Profibus DP Marin

Norms

Halogenfree, max content corrosive and toxic gases	IEC 60754-1, -2
Sheathing material	IEC 60092-360 (359)
Flame retardant	IEC 60332-1
Toxic gases max.	EN 50305 9.2
Fire retardant	IEC 60332-3-22
Ozone resistant	DIN VDE 0472 part 805 B 1483
Smoke emission	IEC 61034-1, -2
Field bus specifications	IEC 61158-2 ed. 1
UV-resistant	ASTM G 154
Certification	DNV-GL, ABS
Part No.	1091038



This product is also available with MUD resistant jacket, Part.no. 1091039
or armoured, Part.no. 1087370
or armoured with MUD resistant jacket, Part.no. 1091035



Attenuation nominal, max 105%

Frequency MHz	Attenuation dB/100m
16	<4.5
4	<2.2
0,038	<0.5
0.0096	<0.3



QFCI

NEK TS 606 F101(F1)

DNV-GL, ABS


Application

Fiberoptical cable for the oil- and offshore industry and other harsh environments. The cable has excellent communication properties and is tested to be operative in at least 180 min. at 1,000°C which means that it can maintain vital communication in case of a fire situation. The fibers are protected in jelly filled loose tubes stranded around a central strength member to ensure optimum performance and long life. Each fiber and loose tube is color coded for easy identification during splicing and termination.



Construction

Fibers	Loose tube jelly filled MM 62.5 and 50, SM 9
Loose tube diam.	2.2 [mm]
Inner jacket	SHF1 10.1 [mm]
Tensile strength support	Centre steel wire
Armour alt.1	Galvanised steel wire braid
Armour alt.2	Tinned Cu-braid
Armour alt.3	Bronze wire braid
Jacket	Black SHF1
O.D.	13.5 [mm]
Weight	260 [kg/km]
Jacket marking	NEK Kabel QFCI FIBER OPTIC CABLE IEC 60331-25 SHF1



Specifications

Operating temperature	-40 – +70 [°C]
Temperature @ installation	-10 to +60 [°C]
Tensile strength installed	500 [N]
Crush test	3000 [N/10cm]
Impact	30 [J]
Torsion	±1 [turn/m]
Min. bending radius	15 [x outer diam]
Min. bending radius flexible	20 [x outer diam]

Norms and tables for QFCI

Norms

Halogenfree, max content corrosive and toxic gases	IEC 60754-1, -2
Sheathing material	IEC 60092-360 (359) NEK TS 606 F101 (F1)
Fire retardant	IEC 60332-3-22 Cat.A
Fire resistant	IEC 60331-25 180 min. 1,000°C
Weather resistant	IEC 60794-1-22-F1
Ozone resistant	IEC 60811-2-1
Oil and fuel, hydrocarbons resistant	IEC 60811-404 IRM 903
Smoke emission	IEC 61034-1, -2 EN 50268-2
UV-resistant	ASTM G 154
Certification	DNV-GL, ABS



Also available with SHF2 jacket or SHF2 MUD.
Alternatively with copper or bronze armour.

Table Fiber

Number of fibers	Number of fibers per tube	Number of fibers and tubes	Weight [kg/km]	Part no.
4 - 9/125	2	2 + 4	260	1042410
8 - 9/125	4	2 + 4	260	1042411
12 - 9/125	4	3 + 3	260	1042412
24 - 9/125	6	4 + 2	260	1042413
48 - 9/125	12	4 + 2	260	1042414
4 - 62.5/125	2	2 + 4	260	1042415
8 - 62.5/125	4	2 + 4	260	1042416
12 - 62.5/125	4	3 + 3	260	1042417
24 - 62.5/125	6	4 + 2	260	1042418
48 - 62.5/125	12	4 + 2	260	1042419
4 - 50/125 OM3	2	2 + 4	260	1042420
8 - 50/125 OM3	4	2 + 4	260	1042421
12 - 50/125 OM3	4	3 + 3	260	1042422
24 - 50/125 OM3	6	4 + 2	260	1042423
48 - 50/125 OM3	12	4 + 2	260	1042424
4 - 50/125 OM2	2	2 + 4	260	1091195
8 - 50/125 OM2	4	2 + 4	260	1091196
12 - 50/125 OM2	4	3 + 3	260	1091197
24 - 50/125 OM2	6	4 + 2	260	1091198
12 - 9/125	6	3 + 3	260	1091091
24 - 9/125	6	4 + 2	260	1091092
48 - 9/125	12	4 + 2	260	1091093

QFCU (QFCI MUD)

**Armoured SHF2, UV
NEK 606, F5, QFCB
Loose tube, jelly filled
DNV-GL, ABS**


Application

Fiberoptical cable for use in vital communication and emergency systems, which needs to be operational during a fire situation (180 min. 1000°C). The fibers are protected in jelly filled loose tubes stranded around a central strength member to ensure high performance and long endurance. Individual colours for each fiber. 62.5, 50 and 9 µm fibers. MUD resistant jacket.



Construction

Fibers	Loose tube jelly filled MM 62.5 and 50, SM 9
Loose tube diam.	2.2 [mm] Mica tape on each loose tube
Inner jacket	SHF1
Tensile strength support	Centre steel wire
Armour alt.1	Galvanised steel wire braid
Armour alt.2	Tinned Cu-braid
Armour alt.3	Bronze wire braid
Jacket	Black SHF2
O.D.	16,5 [mm]
Weight	350 [kg/km]



Specifications

Operating temperature	-40 – +70 [°C]
Temperature @ installation	-10 to +60 [°C]
Tensile strength installed	500 [N]
Crush test	3000 [N/10cm]
Impact	30 [J]
Torsion	±1 [turn/m]
Min. bending radius	15 [x outer diam]
Min. bending radius flexible	20 [x outer diam]

Norms and tables for QFCU (QFCI MUD)

Norms

Halogenfree, max content corrosive and toxic gases	IEC 60754-1, -2
Sheathing material	IEC 60092-360 (359) NEK TS 606 F101 (F1)
Flame retardant	IEC 60332-3-22 cat.A
Fire resistant	IEC 60331-25 min. 1000°C
Ozone resistant	IEC 60811-2-1
Smoke emission	IEC 61034-1, -2
Chemical resistance	EC 60811-2-1 (Mineral oils)
MUD resistant	NEK TS 606 F5
UV-resistant	ASTM G 154
Certification	DNV-GL, ABS



Table Fiber

Number of fibers	Number of fibers per tube	Number of fibers and tubes	Weight [kg/km]	Part no.
4 - 62,5/125	2	2 + 4	325	1091114
8 - 62,5/125	4	2 + 4	325	1091115
12 - 62,5/125	4	3 + 3	325	1091116
24 - 62,5/125	6	4 + 2	325	1091117
48 - 62,5/125	12	4 + 2	325	1091126
4 - 50/125 OM3	2	2 + 4	325	1091125
8 - 50/125 OM3	4	2 + 4	325	1091118
12 - 50/125 OM3	4	3 + 3	325	1091119
24 - 50/125 OM3	6	4 + 2	325	1091124
48 - 50/125 OM3	12	4 + 2	325	1091146
4 - 50/125 OM2	2	2 + 4	325	1042464
8 - 50/125 OM2	4	2 + 4	325	1042465
12 - 50/125 OM2	4	3 + 3	325	1042466
24 - 50/125	6	4 + 2	325	1042467
48 - 50/125	12	4 + 2	325	1091150
4 - 9/125	2	2 + 4	325	1091147
8 - 9/125	4	2 + 4	325	1091191
12 - 9/125	4	3 + 3	325	1091192
24 - 9/125	6	4 + 2	325	1091193
48 - 9/125	12	4 + 2	325	1091194



QFAI UNI

Fire resistant

4 – 24 optical fibres, loose tube

Nonmetallic, SHF1

DNV-GL, ABS


Application

A robust fibre cable suited for harsh ship- and offshore environment. It has no metal content, which leaves it immune to electric and electromagnetic shockwaves. For LAN and WAN installations as well as telecommunication and data transmission on board. UV resistant and rodent protected, SHF1 outer jacket. Fire resistant; operational for 90 min. if exposed to fire.



Construction

Fibers	Loose tube Jelly filled PBTP tube 2,8 mm up to 12 fibres 3,5 mm above 12 fibres	
Colour code	1- Natural 2- Red 3- Green 4- Yellow 5- Brown 6- Blue 7- Violet 8- Orange 9- Grey 10- White 11- Black 12- Pink	13- Turquoise 14- Red (with black rings) 15- Green (with black rings) 16- Yellow (with black rings) 17- Brown (with black rings) 18- Blue (with black rings) 19- Violet (with black rings) 20- Orange (with black rings) 21- Grey (with black rings) 22- White (with black rings) 23- Pink (with black rings) 24-Turquoise (with black rings)
Fire resistant barrier	Mica tape	
Armour	Glass yarn	
Jacket	Red SHF1	
O.D.	≤ 12 fibres, 7,5 [mm] > 12 fibres, 8,5 [mm]	
Weight	≤ 12 fibres, 60 [kg/km] > 12 fibres, 70 [kg/km]	



Specifications

Operating temperature	-40 – 70 [°C]
Temperature @ installation	-5 – +50 [°C]
Tensile strength	2,500 [N] IEC 60794-1-2 E1
Crush test	3,000 [N/10cm] IEC 60794-1-2 E3
Impact	10 [J]
Min. bending radius	10 [x outer diam] IEC 60794-1-2 E11A
Min. bending radius flexible	15 [x outer diam]

Norms for QFAI UNI

Norms

Halogenfree, max content corrosive and toxic gases	<0.3% when measured according to IEC 60754-1, -2
Sheathing material	IEC 60092-360 (359)
Flame retardant	IEC 60332-1-2
Fire retardant	IEC 60332-3-22
Fire resistant	IEC 60331-25
Smoke emission	IEC 61034-1, -2
Test and material	Circuit integrity test IEC 60331-11 / IEC 60331-25 (1000°C, 90 min.) max change of attenuation 2,0 dB Circuit integrity test EN 50200 (842°C, 90 min.) max change of attenuation 2,0 dB Fire load: 1,03 MJ/m
UV-resistant	ASTM G 154 IEC 60068-2-5
Certification	DNV-GL, ABS



Specifications and properties for available fibre types can be found at nek-sealine.com under Multimode or Singlemode optical fibres.



AICI

Tight buffered optical cable, 9/125 - 50/125 - 62.5/125

Steel wire braid armour

UV resistant

DNV-GL, ABS

Application

Optical fiber cable for industry environments. The cable is suitable for both indoor and outdoor use. Continuous submergence in water is not recommended. Strength elements of glass yarn around the cable core allow easy installation of long lengths. The 0,9mm tight buffer is easy to strip allowing fast and reliable splicing and connector mounting. Each fibre is color coded for easy identification. Outer jacket is marked to show fibre type and cable type.



Construction

Fibers	4, 8, 12 or 24
Colour code	Individually coloured fibers
Bedding	Glass yarn
Inner jacket	SHF1
Armour alt.1	Galvanised steel wire braid
Armour alt.2	Tinned Cu-braid
Armour alt.3	Bronze wire braid
Outer Jacket	UV-resistant SHF1



Specifications

Operating temperature	-40 – +70 [°C]
Temperature @ installation	-10 to +70 [°C]
Crush test	2000 [N/10cm]
Impact	1 impacts, 25J
Min. bending radius flexible	15 [x outer diam]
Min. bending radius installed	10 [x outer diam]

Norms

Halogenfree, max content corrosive and toxic gases	IEC 60754-1, -2
Sheathing material	IEC 60092-360 (359)
Fire retardant	IEC 60332-3-22 Cat.A
Oil and fuel, hydrocarbons resistant	IEC 60811-3-1
UV-resistant	ASTM G 154
Certification	DNV-GL, ABS

Tables for AICI

Dimensions fibercable

Number of fibers	Outer diam. (mm)	Weight (kg/km)	Tensile strength (N) (at installation/in operation)
4	8.5	105	700/250
8	9.4	125	800/350
12	10.3	145	1,200/500
24	12.1	185	1,700/750



AIAI

Tight buffered fiber optic cable with strong glass yarn shield

Non metallic, waterproof

Up to 24 fibers


Application

This product is absolutely immune against electromagnetic or electrical disturbances in its environment. It is also mechanically strong and waterproof. It is ideal for communication and data transmission in harsh environments as shipboard- and offshore installations close to electrical machinery and power lines.



Construction

Fibers	Tight buffer 0.9 mm
Inner jacket	SHF1
Tensile strength support	Glassfibre yarn
Jacket	Black SHF1
O.D.	12 fibre 6.7mm, 24 fibre 8.5 [mm]
Weight	115 / 160 [kg/km]



Specifications

Operating temperature	-30 – 70 [°C]
Water tightness	No water penetration
Tensile strength installed	2000 [N]
Attenuation	See separate table for fibres
Impact	20 [J]
Min. bending radius	10 [x outer diam]
Min. bending radius flexible	15 [x outer diam]

Norms

Halogenfree, max content corrosive and toxic gases	IEC 60754-1, -2
Sheathing material	IEC 60092-360 (359)
Flame retardant	IEC 60332-1
Smoke emission	IEC 61034-1, -2
UV-resistant	ASTM G 154
Certification	DNV-GL



Technical info fiber cable MM and SM

Multimode fibres			MM 62.5 IEC 60793-2-10 Type A1b Telecordia GR-20-core	MM 62.5 OM1+ HiCap	MM50 ITU-T G651.1 IEC 60793-2-10 Type A1a.1 Telecordia GR-20-core	MM50-OM3 ISO/IEC 11801 IEC 60793-2-10 Type A1a.2 Telecordia GR-20-core	MM50-OM4 ISO/IEC 11801 IEC 60793-2-10 Type A1a.2 Telecordia GR-20-core
ITU-T type			-	-	G 651	-	
Core Diameter		µm	62.5 ± 2	62.5 ± 2	50 ± 2	50 ± 2	50 ± 2
Core non-circularity		%	≤ 5	≤ 5	≤ 5	≤ 5	≤ 5
Cladding Diameter		µm	125 ± 1,0	125 ± 1,0	125 ± 1,0	125 ± 1,0	125 ± 1,0
Coating Diameter		µm	245 ± 5	245 ± 5	242 ± 5	242 ± 5	242 ± 5
Cladding non-circularity		%	0,7	0,7	0,7	0,7	0,7
Core/cladding concentricity error		µm	≤ 1,0	≤ 1,0	≤ 1,0	≤ 1,0	≤ 1,0
Coating/cladding concentricity error		µm	≤ 10	≤ 10	≤ 6	≤ 6	≤ 6
Numerical Aperture		µm	0.275 ± 0.015	0.275 ± 0.015	0.200 ± 0.015	0.200 ± 0.015	0.200 ± 0.015
Proof test		kpsi	≥ 100	≥ 100	≥ 100	≥ 100	≥ 100
Attenuation	at 850 nm	db/km (max)	≤ 3,5	≤ 2,8	≤ 2,8	≤ 2,8	≤ 2,8
	at 1300 nm	db/km (max)	≤ 1,0	≤ 0,7	≤ 0,8	≤ 0,8	≤ 0,8
Bandwidth	at 850 nm	MHz x km	≥ 200	≥ 250	≥ 500	≥ 1500	≥ 3500
	at 1300 nm	MHz x km	≥ 500	≥ 1000	≥ 500	≥ 500	≥ 500
1 G BASE Ethernet	SX 850 nm	m	275	500	600	1000	1100
1 G BASE Ethernet	LX 1300 nm	m	550	1000	550	550	600
1 G BASE	SR 850nm	m	35	65	86	300	550
1 G BASE	LX4 1300 nm	m	300	450	300	300	300

Single mode fibres			Single mode SMR 9/125/250	Single mode SMR LWP 9/125/250	Non-zero Dispersion	Single mode
ITU-T type			G652.B	G652.D	G655	G654
Mode Field diameter (MDF)	at 1310 nm	µm	9.2 ± 0.4	9.2 ± 0.4	-	-
	at 1550 nm	µm	-	-	9.2 ± 0.5	12 ± 0.5
Cladding Diameter		µm	125 ± 1	125 ± 0.7	125 ± 1	125 ± 1
Coating Diameter		µm	245 ± 10	245 ± 5	245 ± 10	245 ± 10
Attenuation	at 1310 nm	db/km (max)	≤ 0.38	≤ 0.35	-	-
	at 1383 nm	db/km (max)	-	≤ 0.33	-	-
	at 1550 nm	db/km (max)	≤ 0.25	≤ 0.25	≤ 0.25	≤ 0.19
	at 1625 nm	db/km (max)	-	≤ 0.28	≤ 0.28	≤ 0.21
Zero dispersion wavelength		λ0	1302 - 1322	1302 - 1322	-	-
Chromatic Dispersion	at 1285 - 1330nm	ps/nm x km	≤ 0.35	≤ 0.35	-	-
	at 1550 nm	ps/nm x km	≤ 18.0	≤ 18.0	-	-
	at 1530 - 1565 nm	ps/nm x km	-	-	5.5 to 10.0	22
	at 1565 - 1625 nm	ps/nm x km	-	-	7.5 to 13.0	-
PDM	at 1550 nm	ps/vkm	-	-	≤ 0.20	≤ 0.20
1 G BASE Ethernet	SX 1310 nm	m	10000	10000		
1 G BASE Ethernet	LX 1550 nm	m	40000	40000		
1 G BASE	SR 1310nm	m	10000	10000		
1 G BASE	LX 1550 nm	m	40000	40000		



Data for fiber continues

Properties	SMR ITU-T G652D	SMR ITU-T G657A	SMR ITU-T G657B	SMR NZD ITU-T G655.E
Mode field Diameter @ 1310 nm	9,0±0,4 µm	9,2±0,4µm	8,9±0,4 µm	-
Mode field Diameter @ 1550 nm	10,1±0,5µm	10,1±0,5µm	9,9±0,5µm	9,2±0,5µm
Cladding diameter	125±0,7µm	125±0,7µm	125±0,7µm	125±1,0µm
Coating diameter	242±7 µm	242±7 µm	242±7 µm	242±7 µm
Cladding non-circularity	≤ 0,7 %	≤ 0,7 %	≤ 0,7 %	≤ 0,7 %
Core/Cladding concentricity error	≤ 0,5 µm	≤ 0,5 µm	≤ 0,5 µm	≤ 0,5 µm
Coating/cladding concentricity error	≤ 12 µm	≤ 12 µm	≤ 12 µm	≤ 12 µm
Cable Cut off wavelength	≤ 1260 nm	≤ 1260 nm	≤ 1260 nm	≤ 1300 nm
Zero dispersion wavelength (λ ₀)	1300-1322 µm	1300-1322 µm	1300-1324 µm-	≤ 1440 nm
Dispersion slope (S ₀) @ (λ ₀)	≤ 0,090 ps/(nm ² * km)	≤ 0,090 ps/(nm ² * km)	≤ 0,092 ps/(nm ² * km)	-
Chromatic dispersion @ 1285 – 1330 nm	≤ 3,5 ps/(nm * km)	≤ 3,5 ps/(nm * km)	-	-
Chromatic dispersion @ 1550 nm	≤ 18 ps/(nm * km)	≤ 18 ps/(nm * km)	-	-
Chromatic dispersion @ 1625 nm	≤ 22 ps/(nm * km)	≤ 22 ps/(nm * km)	-	-
Chromatic dispersion @ 1530 – 1565 nm	-	-	-	5,5 + 10 ps/(nm * km)
Chromatic dispersion @ 1565 – 1625 nm	-	-	-	7,5 + 13,8 ps/(nm * km)
PMD @ 1550 nm	≤ 0,1 ps/√ km	≤ 0,1 ps/√ km	≤ 0,1 ps/√ km	≤ 0,2 ps/√ km
Attenuation @ 1310 nm	≤ 0,35 dB/km	≤ 0,35 dB/km	≤ 0,35 dB/km	≤ 0,40 dB/km
Attenuation @ 1383nm	≤ 0,35 dB/km	≤ 0,35 dB/km	≤ 0,35 dB/km	≤ 1,00 dB/km
Attenuation @ 1550 nm	≤ 0,25 dB/km	≤ 0,25 dB/km	≤ 0,25 dB/km	≤ 0,25 dB/km
Attenuation @ 1625 nm	≤ 0,28 dB/km	≤ 0,28 dB/km	≤ 0,28 dB/km	≤ 0,28 dB/km
Attenuation with bending:				
Mandreal Radius 15mm @1550 10 turns	-	≤ 0,25 dB	≤ 0,03 dB	-
Mandreal Radius 15mm @1625 10 turns	-	≤ 1,0 dB	≤ 1,0 dB	-
Mandreal Radius 10mm @1550 1 turn	-	≤ 0,75 dB	≤ 0,1 dB	-
Mandreal Radius 10mm @1625 1 turn	-	≤ 1,5 dB	≤ 0,2 dB	-
Mandreal Radius 7,5mm @1550 1 turn	-	-	≤ 0,5dB	-
Mandreal Radius 7,5mm @1625 1 turn	-	-	≤ 01,0dB	-
Proof test	≥ 100 kpsi	≥ 100 kpsi	≥ 100 kpsi	≥ 100 kpsi





Asia Pacific
Company: AX Coleman Pte Ltd
Contact Joe Sim
Email Joe.Sim@axcoleman.com